



## Pulleys for Timing Belts

<b>Imperial</b>	<b>MXL</b>	<b>Pilot Bore</b>
	<b>XL</b>	<b>Pilot Bore</b>
	<b>L</b>	<b>Pilot Bore &amp; Taper Bush</b>
	<b>H</b>	<b>Pilot Bore &amp; Taper Bush</b>
	<b>XH</b>	<b>Taper Bush</b>
<b>Metric</b>	<b>T2.5</b>	<b>Pilot Bore</b>
	<b>T5</b>	<b>Pilot Bore</b>
	<b>AT5</b>	<b>Pilot Bore</b>
	<b>T10</b>	<b>Pilot Bore</b>
	<b>AT10</b>	<b>Pilot Bore</b>
	<b>3M</b>	<b>Pilot Bore</b>
	<b>5M</b>	<b>Pilot Bore &amp; Taper Bush</b>
	<b>8M</b>	<b>Pilot Bore &amp; Taper Bush</b>
<b>14M</b>	<b>Pilot Bore &amp; Taper Bush</b>	

Metric Timing Pulleys include


Omega  
HTD  
Poly Chain GT2

Taper Bush details are shown at the end of this catalogue

Imp Timing Pulleys -- **MXL025** (For Belt - 2.032 Pitch x 6.35 Wide) 0.080"x 1/4"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
16MXL025PB	16	MF	10,35	9,84	15	15	8,5	16	Solid	Al
18MXL025PB	18	MF	11,64	11,12	16	16	8,5	16	Solid	Al
20MXL025PB	20	MF	12,94	12,43	16	16	8,5	16	Solid	Al
22MXL025PB	22	6F	14,23	13,72	17,5	10	11	16	3	Al
24MXL025PB	24	6F	15,52	15,01	20	10	11	16	3	Al
28MXL025PB	28	6F	18,11	17,60	25	11	11	16	4	Al
30MXL025PB	30	6F	19,40	18,90	25	12	11	16	4	Al
32MXL025PB	32	6F	20,70	20,19	25	14	11	16	4	Al
36MXL025PB	36	6F	23,29	22,78	28	16	11	16	4	Al
40MXL025PB	40	6F	25,87	25,37	32	18	11	16	5	Al
42MXL025PB	42	6F	27,17	26,67	32	18	11	16	5	Al
44MXL025PB	44	6F	28,46	27,95	37	18	11	16	5	Al
48MXL025PB	48	6	31,05	30,54	-	20	11	16	5	Al
60MXL025PB	60	6	38,81	38,30	-	24	11	16	6	Al
72MXL025PB	72	6	46,57	46,06	-	25	11	16	6	Al




Style MF

Imp Timing Pulleys -- **XL037** (For Belt - 5.08 Pitch x 9.53 Wide) 1/5"x 3/8"

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
10XL037PB	10	6F	16.17	15.7	23	9.5	14	20	Solid	Al
11XL037PB	11	6F	17.79	17.3	23	9.5	14	20	Solid	Al
12XL037PB	12	6F	19.4	18.9	25	10	14	20	Solid	Al
13XL037PB	13	6F	21.02	20.5	25	10	14	20	Solid	Al
14XL037PB	14	6F	22.64	22.1	28	15	14	20	Solid	Al
15XL037PB	15	6F	24.26	23.8	28	15	14	20	Solid	Al
16XL037PB	16	6F	25.87	25.4	32	16	14	20	Solid	Al
17XL037PB	17	6F	27.49	27	32	20	14	20	Solid	Al
18XL037PB	18	6F	29.11	28.6	35	20	14	20	Solid	Al
19XL037PB	19	6F	30.72	30.2	35	20	14	22	Solid	Al
20XL037PB	20	6F	32.34	31.8	38	23.5	14	22	Solid	Al
21XL037PB	21	6F	33.96	33.5	38	23.5	14	22	Solid	Al
22XL037PB	22	6F	35.57	35.1	41	25	14	22	6	Al
24XL037PB	24	6F	38.81	38.3	44	30	14	22	6	Al
26XL037PB	26	6F	42.04	41.5	48	30	14	22	8	Al
27XL037PB	27	6F	43.66	43.2	48	30	14	22	8	Al
28XL037PB	28	6F	45.28	44.8	51	34	14	22	8	Al
30XL037PB	30	6F	48.51	48	54	38	14	22	8	Al
32XL037PB	32	6F	51.74	51.2	57	38	14	25	8	Al
34XL037PB	34	6F	54.98	54.5	61	38	14	25	8	Al
35XL037PB	35	6F	56.6	56.1	61	38	14	25	8	Al
36XL037PB	36	6	58.21	57.7	-	45	14	25	8	Al
38XL037PB	38	6	61.45	60.9	-	45	14	25	8	Al
40XL037PB	40	6	64.68	64.2	-	45	14	25	8	Al
42XL037PB	42	6	67.91	67.4	-	45	14	25	8	Al
44XL037PB	44	6	71.15	70.6	-	45	14	25	8	Al
48XL037PB	48	6W	77.62	77.1	-	45	14	25	10	Al
60XL037PB	60	6W	97.02	96.5	-	45	14	25	10	Al
72XL037PB	72	6W	116.42	116	-	45	14	25	10	Al

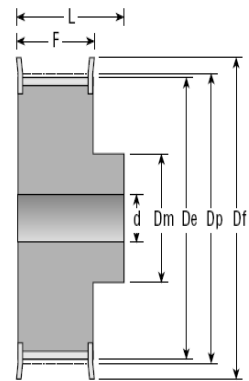

Style 6F

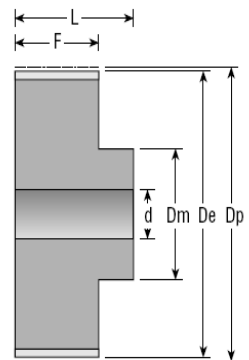


Style 6


Imp Timing Pulleys -- L050 (For Belt - 9.525 Pitch x 12.7 Wide) 3/8"x 1/2"



Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
10L050PB	10	6F	30.33	29.6	37	20	19	28	8	St.
11L050PB	11	6F	33.35	32.6	37	22	19	30	8	St.
12L050PB	12	6F	36.37	35.6	43	24	19	30	8	St.
13L050PB	13	6F	39.41	38.7	44	28	19	30	8	St.
14L050PB	14	6F	42.44	41.7	48	28	19	30	8	St.
15L050PB	15	6F	45.48	44.7	51	34	19	30	8	St.
16L050PB	16	6F	48.51	47.8	54	36	19	32	8	St.
17L050PB	17	6F	51.54	50.8	57	36	19	32	10	St.
18L050PB	18	6F	54.59	53.8	60	40	19	32	10	St.
19L050PB	19	6F	57.61	56.8	64	40	19	32	10	St.
20L050PB	20	6F	60.63	59.9	66.5	40	19	32	10	St.
21L050PB	21	6F	63.68	62.9	70	45	19	32	10	St.
22L050PB	22	6F	66.7	65.9	75	45	19	32	10	St.
23L050PB	23	6F	69.73	69	79	55	19	32	10	St.
24L050PB	24	6F	72.77	72	79	55	19	32	10	St.
25L050PB	25	6F	75.8	75	82.5	58	19	32	10	St.
26L050PB	26	6F	78.84	78.1	86	58	19	32	11	St.
27L050PB	27	6F	81.86	81.1	86	58	19	32	11	St.
28L050PB	28	6F	84.89	84.1	91	58	19	32	11	St.
30L050PB	30	6F	90.96	90.2	97	70	19	32	11	St.
32L050PB	32	6F	97.03	96.3	102	70	19	32	11	St.
33L050PB	33	6F	100.05	99.3	106	70	19	32	11	St.
34L050PB	34	6F	103.08	102	112	70	19	32	11	St.
35L050PB	35	6F	106.12	105	112	70	19	32	11	St.
36L050PB	36	6F	109.14	108	115	70	19	32	11	St.
40L050PB	40	6F	121.29	121	128	70	19	32	11	St.
42L050PB	42	6F	127.34	127	135	70	19	32	11	St.
44L050PB	44	6F	133.4	133	142	70	19	32	11	St.
45L050PB	45	6F	136.44	136	142	70	19	32	11	St.
48L050PB	48	6F	145.54	145	150	70	19	32	11	St.
50L050PB	50	6A	151.6	151	-	70	19	32	14	C.I.
52L050PB	52	6A	157.66	157	-	70	19	32	14	C.I.
56L050PB	56	6A	169.79	169	-	70	19	32	14	C.I.
57L050PB	57	6A	172.82	172	-	70	19	32	14	C.I.
60L050PB	60	6A	181.92	181	-	75	19	42	14	C.I.
72L050PB	72	6A	218.29	218	-	75	19	42	14	C.I.
84L050PB	84	6A	254.69	254	-	75	19	42	14	C.I.
96L050PB	96	6A	291.06	290	-	75	19	42	14	C.I.



Style  
6W



Style  
6A

Imp Timing Pulleys -- L075 (For Belt - 9.525 Pitch x 19.5 Wide) 3/8"x 3/4"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
10L075PB	10	6F	30.33	29.6	37	20	25	38	8	St.
11L075PB	11	6F	33.35	32.6	37	22	25	38	8	St.
12L075PB	12	6F	36.37	35.6	43	24	25	38	8	St.
13L075PB	13	6F	39.41	38.7	44	28	25	38	8	St.
14L075PB	14	6F	42.44	41.7	48	28	25	38	11	St.
15L075PB	15	6F	45.48	44.7	51	34	25	38	11	St.
16L075PB	16	6F	48.51	47.8	54	36	25	38	11	St.
17L075PB	17	6F	51.54	50.8	57	36	25	38	11	St.
18L075PB	18	6F	54.59	53.8	60	40	25	38	11	St.
19L075PB	19	6F	57.61	56.8	64	40	25	38	11	St.
20L075PB	20	6F	60.63	59.9	66.5	40	25	38	11	St.
21L075PB	21	6F	63.68	62.9	70	45	25	38	11	St.
22L075PB	22	6F	66.7	65.9	75	45	25	38	11	St.
23L075PB	23	6F	69.73	69	79	55	25	38	11	St.
24L075PB	24	6F	72.77	72	79	55	25	38	11	St.
25L075PB	25	6F	75.8	75	82.5	58	25	38	11	St.
26L075PB	26	6F	78.84	78.1	86	58	25	38	11	St.
27L075PB	27	6F	81.86	81.1	86	58	25	38	11	St.
28L075PB	28	6F	84.89	84.1	91	58	25	38	11	St.
30L075PB	30	6F	90.96	90.2	97	70	25	38	11	St.
32L075PB	32	6F	97.03	96.3	102	70	25	38	11	St.
33L075PB	33	6F	100.05	99.3	106	70	25	38	11	St.
34L075PB	34	6F	103.08	102	112	70	25	38	11	St.
35L075PB	35	6F	106.12	105	112	70	25	38	11	St.
36L075PB	36	6F	109.14	108	115	70	25	38	11	St.
40L075PB	40	6F	121.29	121	128	70	25	38	11	St.
42L075PB	42	6F	127.34	127	135	70	25	38	11	St.
44L075PB	44	6F	133.4	133	142	70	25	38	11	St.
45L075PB	45	6F	136.44	136	142	70	25	38	11	St.
48L075PB	48	6F	145.54	145	150	70	25	38	11	St.
50L075PB	50	6A	151.6	151	-	70	25	38	14	C.I.
52L075PB	52	6A	157.66	157	-	70	25	38	14	C.I.
56L075PB	56	6A	169.79	169	-	70	25	38	14	C.I.
57L075PB	57	6A	172.82	172	-	70	25	38	14	C.I.
60L075PB	60	6A	181.92	181	-	75	25	45	14	C.I.
72L075PB	72	6A	218.29	218	-	75	25	45	14	C.I.
84L075PB	84	6A	254.69	254	-	75	25	45	14	C.I.
96L075PB	96	6A	291.06	290	-	75	25	45	14	C.I.


Imp Timing Pulleys -- L100 (For Belt - 9.525 Pitch x 25.4 Wide) 3/8"x 1"



Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
10L100PB	10	6F	30.33	29.6	37	20	32	45	8	St.
11L100PB	11	6F	33.35	32.6	37	22	32	45	8	St.
12L100PB	12	6F	36.37	35.6	43	24	32	45	8	St.
13L100PB	13	6F	39.41	38.7	44	28	32	45	8	St.
14L100PB	14	6F	42.44	41.7	48	28	32	45	11	St.
15L100PB	15	6F	45.48	44.7	51	34	32	45	11	St.
16L100PB	16	6F	48.51	47.8	54	36	32	45	11	St.
17L100PB	17	6F	51.54	50.8	57	36	32	45	11	St.
18L100PB	18	6F	54.59	53.8	60	40	32	45	11	St.
19L100PB	19	6F	57.61	56.8	64	40	32	45	11	St.
20L100PB	20	6F	60.63	59.9	66.5	40	32	45	11	St.
21L100PB	21	6F	63.68	62.9	70	45	32	45	11	St.
22L100PB	22	6F	66.7	65.9	75	45	32	45	11	St.
23L100PB	23	6F	69.73	69	79	55	32	45	11	St.
24L100PB	24	6F	72.77	72	79	55	32	45	11	St.
25L100PB	25	6F	75.8	75	82.5	58	32	45	11	St.
26L100PB	26	6F	78.84	78.1	86	58	32	45	11	St.
27L100PB	27	6F	81.86	81.1	86	58	32	45	11	St.
28L100PB	28	6F	84.89	84.1	91	58	32	45	11	St.
30L100PB	30	6F	90.96	90.2	97	70	32	45	11	St.
32L100PB	32	6F	97.03	96.3	102	70	32	45	11	St.
33L100PB	33	6F	100.05	99.3	106	70	32	45	11	St.
34L100PB	34	6F	103.08	102	112	70	32	45	11	St.
35L100PB	35	6F	106.12	105	112	70	32	45	11	St.
36L100PB	36	6F	109.14	108	115	70	32	45	11	St.
40L100PB	40	6F	121.29	121	128	70	32	45	11	St.
42L100PB	42	6F	127.34	127	135	70	32	45	11	St.
44L100PB	44	6F	133.4	133	142	70	32	45	11	St.
45L100PB	45	6F	136.44	136	142	70	32	45	11	St.
48L100PB	48	6F	145.54	145	150	70	32	45	11	St.
50L100PB	50	6A	151.6	151	-	70	32	45	14	C.I.
52L100PB	52	6A	157.66	157	-	70	32	45	14	C.I.
56L100PB	56	6A	169.79	169	-	70	32	45	14	C.I.
57L100PB	57	6A	172.82	172	-	70	32	45	14	C.I.
60L100PB	60	6A	181.92	181	-	75	32	45	14	C.I.
72L100PB	72	6A	218.29	218	-	75	32	45	14	C.I.
84L100PB	84	6A	254.69	254	-	75	32	45	14	C.I.
96L100PB	96	6A	291.06	290	-	75	32	45	14	C.I.

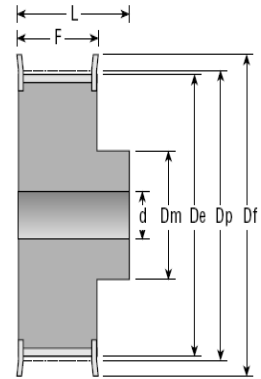

Style  
6F

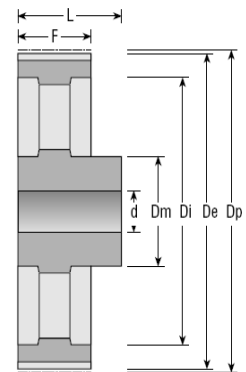


Style  
6A


Imp Timing Pulleys -- **H075** (For Belt - 12.7 Pitch x 19.05 Wide) 1/2"x 3/4"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
14H075PB	14	6F	56.59	55.2	64	40	26	40	Solid	St.
15H075PB	15	6F	60.64	59.3	66.5	45	26	40	Solid	St.
16H075PB	16	6F	64.67	63.3	70	45	26	40	Solid	St.
17H075PB	17	6F	68.72	67.4	75	45	26	40	Solid	St.
18H075PB	18	6F	72.77	71.4	79	55	26	40	Solid	St.
19H075PB	19	6F	76.81	75.4	82.5	60	26	40	11	St.
20H075PB	20	6F	80.85	79.5	87	62	26	40	11	St.
21H075PB	21	6F	84.89	83.5	91	65	26	40	11	St.
22H075PB	22	6F	88.93	87.6	94	68	26	40	11	St.
23H075PB	23	6F	92.98	91.6	97	72	26	40	11	St.
24H075PB	24	6F	97.03	95.7	102	72	26	40	11	St.
25H075PB	25	6F	101.06	99.7	106	72	26	40	11	St.
26H075PB	26	6F	105.11	104	112	80	26	40	11	St.
27H075PB	27	6F	109.15	108	115	80	26	40	11	St.
28H075PB	28	6F	113.18	112	120	80	26	40	11	St.
30H075PB	30	6F	121.29	120	128	80	26	40	11	St.
32H075PB	32	6F	129.3	128	135	80	26	40	11	St.
33H075PB	33	6F	133.4	132	142	80	26	40	11	St.
34H075PB	34	6F	137.45	136	142	80	26	40	11	St.
35H075PB	35	6F	141.49	140	150	80	26	40	11	St.
36H075PB	36	6F	145.54	144	150	80	26	40	11	St.
38H075PB	38	6F	153.62	152	158	80	26	40	11	St.
40H075PB	40	6F	161.7	160	168	80	26	40	11	St.
42H075PB	42	6F	169.79	168	184	80	26	40	11	St.
44H075PB	44	6WF	177.8	177	184	80	26	40	14	St.
48H075PB	48	6WF	194.03	193	200	90	26	45	14	St.
50H075PB	50	6A	202.13	201	-	90	26	45	14	C.I.



Style 6A

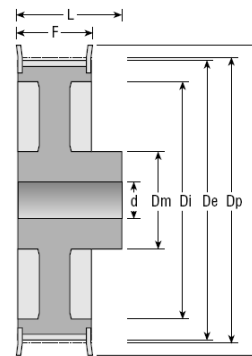

Style 6WF

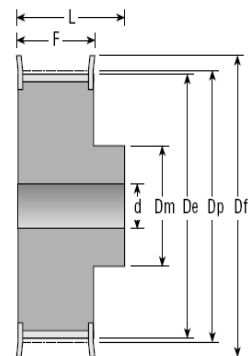

Style 6F

Imp Timing Pulleys -- **H100** (For Belt - 12.7 Pitch x 25.4 Wide) 1/2" x 1"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
14H100PB	14	6F	56.59	55.2	64	40	32	45	Solid	St.
15H100PB	15	6F	60.64	59.3	66.5	45	32	45	Solid	St.
16H100PB	16	6F	64.67	63.3	70	45	32	45	Solid	St.
17H100PB	17	6F	68.72	67.4	75	45	32	45	Solid	St.
18H100PB	18	6F	72.77	71.4	79	55	32	45	Solid	St.
19H100PB	19	6F	76.81	75.4	82.5	60	32	45	14	St.
20H100PB	20	6F	80.85	79.5	87	62	32	45	14	St.
21H100PB	21	6F	84.89	83.5	91	65	32	45	14	St.
22H100PB	22	6F	88.93	87.6	94	68	32	45	14	St.
23H100PB	23	6F	92.98	91.6	97	72	32	45	14	St.
24H100PB	24	6F	97.03	95.7	102	72	32	45	14	St.
25H100PB	25	6F	101.06	99.7	106	72	32	45	14	St.
26H100PB	26	6F	105.11	104	112	80	32	45	14	St.
27H100PB	27	6F	109.15	108	115	80	32	45	14	St.
28H100PB	28	6F	113.18	112	120	80	32	45	14	St.
29H100PB	29	6F	117.23	116	120	80	32	45	14	St.
30H100PB	30	6F	121.29	120	128	80	32	45	14	St.
32H100PB	32	6F	129.3	128	135	80	32	45	14	St.
33H100PB	33	6F	133.4	132	142	80	32	45	14	St.
34H100PB	34	6F	137.45	136	142	80	32	45	14	St.
35H100PB	35	6F	141.49	140	150	80	32	45	14	St.
36H100PB	36	6F	145.54	144	150	80	32	45	14	St.
38H100PB	38	6F	153.62	152	158	80	32	45	14	St.
40H100PB	40	6F	161.7	160	168	80	32	45	14	St.
42H100PB	42	6F	169.79	168	180	80	32	45	14	St.
44H100PB	44	6WF	177.88	177	184	80	32	50	14	C.I.
45H100PB	45	6WF	181.91	181	192	80	32	50	14	C.I.
48H100PB	48	6WF	194.03	193	200	90	32	50	14	C.I.
50H100PB	50	6A	202.13	201	-	90	32	50	19	C.I.
52H100PB	52	6A	210.21	209	-	90	32	50	19	C.I.
58H100PB	58	6A	234.47	233	-	90	32	50	19	C.I.
60H100PB	60	6A	242.55	241	-	120	32	50	19	C.I.
70H100PB	70	6A	282.98	282	-	120	32	55	19	C.I.
72H100PB	72	6A	291.06	290	-	120	32	55	19	C.I.
84H100PB	84	6A	339.57	338	-	120	32	55	19	C.I.
96H100PB	96	6A	388.09	387	-	120	32	60	19	C.I.
120H100PB	120	6A	485.12	484	-	120	32	60	19	C.I.


Imp Timing Pulleys -- **H150** (For Belt - 12.7 Pitch x 38.1 Wide) 1/2"x 1-1/2"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
14H150PB	14	6F	56.59	55.2	64	42	46	58	Solid	St.
15H150PB	15	6F	60.64	59.3	66.5	45	46	58	Solid	St.
16H150PB	16	6F	64.67	63.3	70	45	46	58	Solid	St.
17H150PB	17	6F	68.72	67.4	75	45	46	58	Solid	St.
18H150PB	18	6F	72.77	71.4	79	55	46	58	Solid	St.
19H150PB	19	6F	76.81	75.4	82.5	60	46	58	Solid	St.
20H150PB	20	6F	80.85	79.5	87	62	46	58	Solid	St.
21H150PB	21	6F	84.89	83.5	91	65	46	58	Solid	St.
22H150PB	22	6F	88.93	87.6	94	68	46	58	Solid	St.
23H150PB	23	6F	92.98	91.6	97	72	46	58	Solid	St.
24H150PB	24	6F	97.03	95.7	102	72	46	58	Solid	St.
25H150PB	25	6F	101.06	99.7	106	72	46	58	Solid	St.
26H150PB	26	6F	105.11	104	112	80	46	58	Solid	St.
27H150PB	27	6F	109.15	108	115	80	46	58	Solid	St.
28H150PB	28	6F	113.18	112	120	80	46	58	Solid	St.
29H150PB	29	6F	117.23	116	120	80	46	58	Solid	St.
30H150PB	30	6F	121.29	120	128	80	46	58	Solid	St.
32H150PB	32	6F	129.3	128	135	80	46	58	Solid	St.
33H150PB	33	6F	133.4	132	142	80	46	58	Solid	St.
34H150PB	34	6F	137.45	136	142	80	46	58	Solid	St.
35H150PB	35	6F	141.49	140	150	80	46	58	Solid	St.
36H150PB	36	6F	145.54	144	150	80	46	58	Solid	St.
38H150PB	38	6F	153.62	152	158	80	46	58	Solid	St.
40H150PB	40	6F	161.7	160	168	80	46	58	Solid	St.
42H150PB	42	6F	169.79	168	180	80	46	58	Solid	St.
44H150PB	44	6WF	177.88	177	184	80	46	58	19	C.I.
45H150PB	45	6WF	181.91	181	192	80	46	58	19	C.I.
48H150PB	48	6WF	194.03	193	200	90	46	65	19	C.I.
50H150PB	50	6A	202.13	201	-	90	46	65	19	C.I.
52H150PB	52	6A	210.21	209	-	90	46	65	19	C.I.
58H150PB	58	6A	234.47	233	-	90	46	65	19	C.I.
60H150PB	60	6A	242.55	241	-	120	46	65	19	C.I.
70H150PB	70	6A	282.98	282	-	120	46	65	24	C.I.
72H150PB	72	6A	291.06	290	-	120	46	65	24	C.I.
84H150PB	84	6A	339.57	338	-	120	46	65	24	C.I.
96H150PB	96	6A	388.09	387	-	120	46	65	24	C.I.
120H150PB	120	6A	485.12	484	-	120	46	65	24	C.I.



Style  
6A

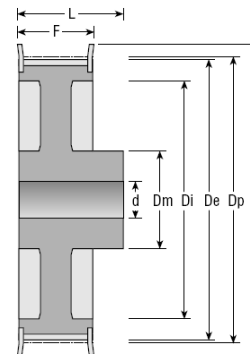

Style  
6WF



Style  
6F



Imp Timing Pulleys -- H200 (For Belt - 12.7 Pitch x 50.8 Wide) 1/2" x 2"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
14H200PB	14	6F	56.59	55.2	64	42	59	70	Solid	St.
15H200PB	15	6F	60.64	59.3	66.5	45	59	70	Solid	St.
16H200PB	16	6F	64.67	63.3	70	45	59	70	Solid	St.
17H200PB	17	6F	68.72	67.4	75	45	59	70	Solid	St.
18H200PB	18	6F	72.77	71.4	79	55	59	70	Solid	St.
19H200PB	19	6F	76.81	75.4	82.5	60	59	70	Solid	St.
20H200PB	20	6F	80.85	79.5	87	62	59	70	Solid	St.
21H200PB	21	6F	84.89	83.5	91	65	59	70	Solid	St.
22H200PB	22	6F	88.93	87.6	94	68	59	70	Solid	St.
23H200PB	23	6F	92.98	91.6	97	72	59	70	Solid	St.
24H200PB	24	6F	97.03	95.7	102	72	59	70	Solid	St.
25H200PB	25	6F	101.06	99.7	106	72	59	70	Solid	St.
26H200PB	26	6F	105.11	104	112	80	59	70	Solid	St.
27H200PB	27	6F	109.15	108	115	80	59	70	Solid	St.
28H200PB	28	6F	113.18	112	120	80	59	70	Solid	St.
29H200PB	29	6F	117.23	116	120	80	59	70	Solid	St.
30H200PB	30	6F	121.29	120	128	80	59	70	Solid	St.
32H200PB	32	6F	129.3	128	135	80	59	70	Solid	St.
33H200PB	33	6F	133.4	132	142	80	59	70	Solid	St.
34H200PB	34	6F	137.45	136	142	80	59	70	Solid	St.
35H200PB	35	6F	141.49	140	150	80	59	70	Solid	St.
36H200PB	36	6F	145.54	144	150	80	59	70	Solid	St.
38H200PB	38	6F	153.62	152	158	80	59	70	Solid	St.
40H200PB	40	6F	161.7	160	168	80	59	70	Solid	St.
42H200PB	42	6F	169.79	168	180	80	59	70	Solid	St.
44H200PB	44	6WF	177.88	177	184	80	59	70	19	C.I.
45H200PB	45	6WF	181.91	181	192	80	59	70	19	C.I.
48H200PB	48	6WF	194.03	193	200	90	59	75	24	C.I.
50H200PB	50	6A	202.13	201	-	90	59	75	24	C.I.
52H200PB	52	6A	210.21	209	-	90	59	75	24	C.I.
58H200PB	58	6A	234.47	233	-	90	59	75	24	C.I.
60H200PB	60	6A	242.55	241	-	120	59	75	24	C.I.
70H200PB	70	6A	282.98	282	-	120	59	75	28	C.I.
72H200PB	72	6A	291.06	290	-	120	59	75	28	C.I.
84H200PB	84	6A	339.57	338	-	120	59	75	28	C.I.
96H200PB	96	6A	388.09	387	-	120	59	75	28	C.I.
120H200PB	120	6A	485.12	484	-	120	59	75	28	C.I.


Imp Timing Pulleys -- H300 (For Belt - 12.7 Pitch x 76.3 Wide) 1/2"x 3"




Reference	Teeth	Style	Dp	De	Df	Dm	F	L	d	Mat'l
14H300PB	14	6F	56.59	55.2	64	42	86	100	Solid	St.
15H300PB	15	6F	60.64	59.3	66.5	45	86	100	Solid	St.
16H300PB	16	6F	64.67	63.3	70	45	86	100	Solid	St.
17H300PB	17	6F	68.72	67.4	75	45	86	100	Solid	St.
18H300PB	18	6F	72.77	71.4	79	55	86	100	Solid	St.
19H300PB	19	6F	76.81	75.4	82.5	60	86	100	Solid	St.
20H300PB	20	6F	80.85	79.5	87	62	86	100	Solid	St.
21H300PB	21	6F	84.89	83.5	91	65	86	100	Solid	St.
22H300PB	22	6F	88.93	87.6	94	68	86	100	Solid	St.
23H300PB	23	6F	92.98	91.6	97	72	86	100	Solid	St.
24H300PB	24	6F	97.03	95.7	102	72	86	100	Solid	St.
25H300PB	25	6F	101.06	99.7	106	72	86	100	Solid	St.
26H300PB	26	6F	105.11	104	112	80	86	100	Solid	St.
27H300PB	27	6F	109.15	108	115	80	86	100	Solid	St.
28H300PB	28	6F	113.18	112	120	80	86	100	Solid	St.
30H300PB	30	6F	121.29	120	128	80	86	100	Solid	St.
32H300PB	32	6F	129.3	128	135	80	86	100	Solid	St.
33H300PB	33	6F	133.4	132	142	80	86	100	Solid	St.
34H300PB	34	6F	137.45	136	142	80	86	100	Solid	St.
35H300PB	35	6F	141.49	140	150	80	86	100	Solid	St.
36H300PB	36	6F	145.54	144	150	80	86	100	Solid	St.
38H300PB	38	6F	153.62	152	158	80	86	100	Solid	St.
40H300PB	40	6F	161.7	160	168	80	86	100	Solid	St.
42H300PB	42	6F	169.79	168	180	80	86	100	Solid	St.
44H300PB	44	6A	177.88	177	-	80	86	100	24	C.I.
48H300PB	48	6A	194.03	193	-	90	86	100	24	C.I.
50H300PB	50	6A	202.13	201	-	90	86	100	24	C.I.
58H300PB	58	6A	234.47	233	-	90	86	100	24	C.I.
60H300PB	60	6A	242.55	241	-	120	86	100	24	C.I.
72H300PB	72	6A	291.06	290	-	120	86	100	28	C.I.
84H300PB	84	6A	339.57	338	-	120	86	100	28	C.I.
96H300PB	96	6A	388.09	387	-	120	86	100	28	C.I.
120H300PB	120	6A	485.12	484	-	120	86	100	28	C.I.



Style  
6A

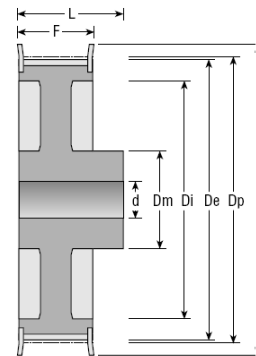

Style  
6WF




Style  
6F




**Imp Timing Pulleys -- L050 (For Belt - 9.525 Pitch x 12.7 Wide) 3/8"x1/2"**

Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18L050	18	8F	1108	28	54,57	53,81	60	45	—	19	22	3
19L050	19	8F	1108	28	57,61	56,84	64	45	—	19	22	3
20L050	20	8F	1108	28	60,64	59,88	66	48	—	19	22	3
21L050	21	8F	1108	28	63,67	62,91	70	48	—	19	22	3
22L050	22	8F	1108	28	66,70	65,94	75	51	—	19	22	3
23L050	23	8F	1108	28	69,73	68,97	79	54	—	19	22	3
24L050	24	8F	1108	28	72,77	72,00	79	54	—	19	22	3
25L050	25	8F	1108	28	75,80	75,04	83	56	—	19	22	3
26L050	26	8F	1108	28	78,83	78,07	87	60	—	19	22	3
27L050	27	8F	1108	28	81,86	81,10	87	62	—	19	22	3
28L050	28	8F	1108	28	84,89	84,13	91	65	—	19	22	3
30L050	30	8F	1108	28	90,96	90,20	97	70	—	19	22	3
32L050	32	8F	1108	28	97,02	96,26	102	74	—	19	22	3
36L050	36	8F	1108	28	109,15	108,39	115	85	—	19	22	3
40L050	40	8F	1610	42	121,28	120,51	128	88	—	19	25	3
44L050	44	8WF	1610	42	133,40	132,64	142	88	110	19	25	3
48L050	48	8WF	1610	42	145,53	144,77	150	88	120	19	25	3
60L050	60	7A	1610	42	181,91	181,15	—	92	166	19	25	3
72L050	72	7A	1610	42	218,30	217,53	—	92	202	19	25	3
84L050	84	7A	1610	42	254,68	253,90	—	92	236	19	25	3
96L050	96	7A	2012	50	291,06	290,30	—	106	270	19	32	6,5
120L050	120	7A	2012	50	363,83	363,07	—	106	343	19	32	6,5




Style 8F Steel



Style 3F Steel

**Imp Timing Pulleys -- L075 (For Belt - 9.525 Pitch x 19.05 Wide) 3/8"x3/4"**


Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18L075	18	3F	1108	28	54,57	53,81	60	—	—	25	25	—
19L075	19	3F	1108	28	57,61	56,84	64	—	—	25	25	—
20L075	20	3F	1108	28	60,64	59,88	66	—	—	25	25	—
21L075	21	3F	1108	28	63,67	62,91	70	—	—	25	25	—
22L075	22	3F	1108	28	66,70	65,94	75	—	—	25	25	—
23L075	23	3F	1108	28	69,73	68,97	79	—	—	25	25	—
24L075	24	3F	1108	28	72,77	72,00	79	—	—	25	25	—
25L075	25	3F	1108	28	75,80	75,04	83	—	—	25	25	—
26L075	26	3F	1108	28	78,83	78,07	87	—	—	25	25	—
27L075	27	3F	1108	28	81,86	81,10	87	—	—	25	25	—
28L075	28	3F	1108	28	84,89	84,13	91	—	—	25	25	—
30L075	30	3F	1108	28	90,96	90,20	97	—	—	25	25	—
32L075	32	3F	1108	28	97,02	96,26	102	—	—	25	25	—
36L075	36	3F	1610	42	109,15	108,39	115	—	—	25	25	—
40L075	40	3F	1610	42	121,28	120,51	128	—	—	25	25	—
44L075	44	3WF	1610	42	133,40	132,64	142	90	110	25	25	—
48L075	48	3WF	1610	42	145,53	144,77	150	92	120	25	25	—
60L075	60	3W	1610	42	181,91	181,15	—	92	166	25	25	—
72L075	72	3A	1610	42	218,30	217,53	—	92	202	25	25	—
84L075	84	7A	2012	50	254,68	253,90	—	92	236	25	32	3,5
96L075	96	7A	2012	50	291,06	290,30	—	106	270	25	32	3,5
120L075	120	7A	2012	50	363,83	363,07	—	106	343	25	32	3,5

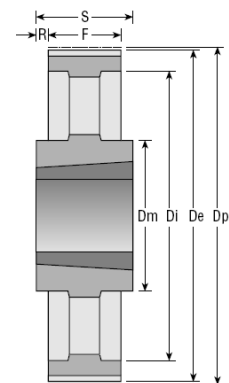


Style 7A CI

**Imp Timing Pulleys -- L100 (For Belt - 9.525 Pitch x 25.4 Wide) 3/8"x1"**


Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18L100	18	5F	1108	28	54,57	53,81	60	—	38	31	22	9
19L100	19	5F	1108	28	57,61	56,84	64	—	38	31	22	9
20L100	20	5F	1108	28	60,64	59,88	66	—	45	31	22	9
21L100	21	5F	1108	28	63,67	62,91	70	—	45	31	22	9
22L100	22	5F	1108	28	66,70	65,94	75	—	48	31	22	9
23L100	23	5F	1108	28	69,73	68,97	79	—	52	32	22	10
24L100	24	5F	1108	28	72,77	72,00	79	—	52	32	22	10
25L100	25	5F	1108	28	75,80	75,04	83	—	54	32	22	10
26L100	26	5F	1108	28	78,83	78,07	87	—	60	32	22	10
27L100	27	5F	1108	28	81,86	81,10	91	—	60	32	22	10
28L100	28	5F	1108	28	84,89	84,13	91	—	65	32	22	10
30L100	30	5F	1210	32	90,96	90,20	97	—	71	32	25	10
32L100	32	5F	1210	32	97,02	96,26	102	—	75	32	25	7
36L100	36	5F	1610	42	109,15	108,39	115	—	86	32	25	7
40L100	40	5F	1610	42	121,28	120,51	128	—	96	32	25	7
44L100	44	5WF	1610	42	133,40	132,64	142	90	110	32	25	7
48L100	48	5WF	1610	42	145,53	144,77	150	92	120	32	25	7
60L100	60	9W	1610	42	181,91	181,15	—	92	166	32	25	3,5
72L100	72	3A	2012	50	218,30	217,53	—	92	202	32	32	—
84L100	84	3A	2012	50	254,68	253,90	—	92	236	32	32	—
96L100	96	3A	2012	50	291,06	290,30	—	106	270	32	32	—
120L100	120	3A	2012	50	363,83	363,07	—	106	343	32	32	—

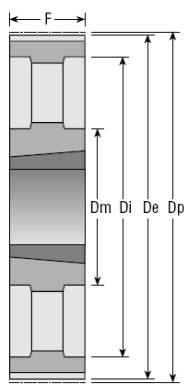


Style 3A CI

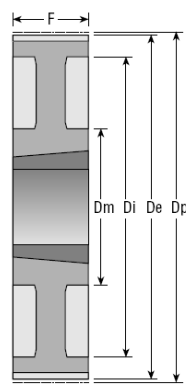


Style 3W CI

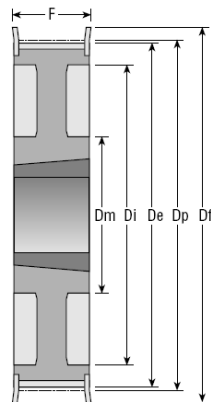


Style 3WF CI




Style 5F Steel

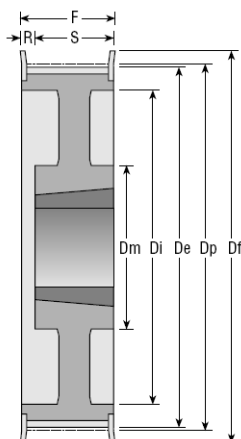

Style 5WF CI

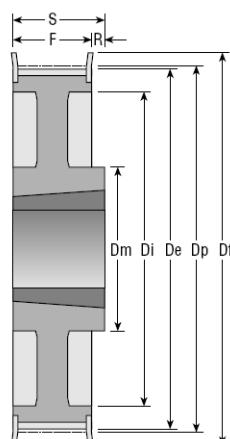

Style 8WF CI

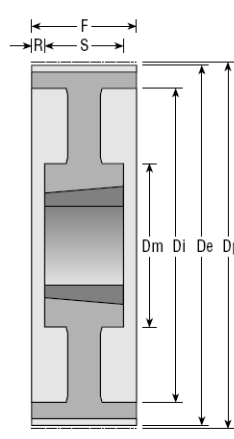


Style 9W CI

Hooper supply pulleys from a number of leading manufacturers. Therefore product designs may vary slightly. Where a dimension is critical please contact Hooper.




**Imp Timing Pulleys -- H100 (For Belt - 12.7 Pitch x 25.4 Wide) 1/2"x1"**

Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
16H100	16	5F	1108	28	64,68	63,31	70	—	45	31	22	9
18H100	18	5F	1210	32	72,77	71,39	79	—	52	31	25	6
19H100	19	5F	1210	32	76,81	75,44	83	—	56	31	25	6
20H100	20	5F	1210	32	80,55	79,48	87	—	60	31	25	6
21H100	21	5F	1210	32	84,89	83,52	91	—	64	32	25	7
22H100	22	5F	1210	32	88,94	87,56	93	—	67	32	25	7
23H100	23	5F	1610	42	92,98	91,61	97	—	70	32	25	7
24H100	24	5F	1610	42	97,02	95,65	102	—	74	32	25	7
25H100	25	5F	1610	42	101,06	99,69	106	—	77	32	25	7
26H100	26	5F	1610	42	105,11	103,73	112	—	82	32	25	7
27H100	27	5F	1610	42	109,15	107,78	115	—	85	32	25	7
28H100	28	5F	1610	42	113,19	111,82	120	—	90	32	25	7
30H100	30	5F	1610	42	121,28	119,90	128	—	98	32	25	7
32H100	32	5WF	1610	42	129,36	127,99	135	80	106	32	25	7
36H100	36	5WF	1610	42	145,53	144,16	150	92	121	32	25	7
40H100	40	5WF	1610	42	161,70	160,33	168	92	138	32	25	7
44H100	44	3WF	2012	50	177,87	176,50	184	106	152	32	32	—
48H100	48	3WF	2012	50	194,04	192,67	200	106	169	32	32	—
60H100	60	9A	2012	50	242,55	241,18	—	92	223	34	32	1
72H100	72	9A	2012	50	291,06	289,69	—	92	270	34	32	1
84H100	84	9A	2012	50	339,57	338,20	—	92	318	34	32	1
96H100	96	7A	2517	60	388,08	386,71	—	106	366	34	45	5,5
120H100	120	7A	2517	60	485,10	483,73	—	106	462	34	45	5,5




Style 5F Steel

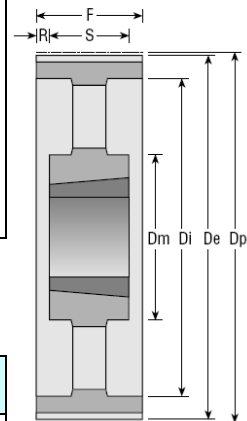

Style 9A CI

**Imp Timing Pulleys -- H150 (For Belt - 12.7 Pitch x 38.1 Wide) 1/2"x1-1/2"**

Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18H150	18	5F	1210	32	72,77	71,39	79	—	52	45	25	20
19H150	19	5F	1210	32	76,81	75,44	83	—	56	45	25	20
20H150	20	5F	1210	32	80,55	79,48	87	—	60	45	25	20
21H150	21	5F	1210	32	84,89	83,52	91	—	64	45	25	20
22H150	22	5F	1210	32	88,94	87,56	93	—	67	45	25	20
23H150	23	5F	1610	42	92,98	91,61	97	—	70	45	25	20
24H150	24	5F	1610	42	97,02	95,65	102	—	74	45	25	20
25H150	25	5F	1610	42	101,06	99,69	106	—	77	45	25	20
26H150	26	5F	1610	42	105,11	103,73	112	—	82	45	25	20
27H150	27	5F	1610	42	109,15	107,78	115	—	85	45	25	20
28H150	28	5F	1610	42	113,19	111,82	120	—	90	45	25	20
30H150	30	5F	1610	42	121,28	119,90	128	—	98	45	25	20
32H150	32	5WF	1610	42	129,36	127,99	135	80	106	45	25	20
36H150	36	5WF	1610	42	145,53	144,16	150	92	121	45	25	20
40H150	40	5WF	1610	42	161,70	160,33	168	92	138	45	25	20
44H150	44	5WF	2012	50	177,87	176,50	184	106	152	45	32	13
48H150	48	5WF	2012	50	194,04	192,67	200	106	169	45	32	13
60H150	60	9A	2012	50	242,55	241,18	—	92	223	46	32	7,5
72H150	72	9A	2012	50	291,06	289,69	—	92	270	46	32	7,5
84H150	84	9A	2012	50	339,57	338,20	—	92	318	46	32	7,5
96H150	96	9A	2517	60	388,08	386,71	—	106	366	46	45	0,5
120H150	120	9A	2517	60	485,10	483,73	—	106	462	46	45	0,5

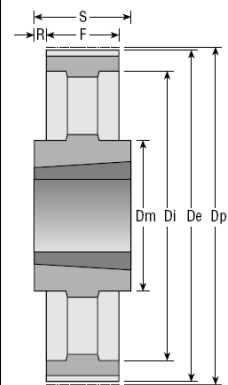


Style 7A CI




**Imp Timing Pulleys -- H200 (For Belt - 12.7 Pitch x 50.8 Wide) 1/2"x 2"**

Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18H200	18	5F	1210	32	72,77	71,39	79	—	52	58	25	33
19H200	19	5F	1210	32	76,81	75,44	83	—	56	58	25	33
20H200	20	5F	1610	42	80,55	79,48	87	—	60	58	25	33
21H200	21	5F	1610	42	84,89	83,52	91	—	64	58	25	33
22H200	22	5F	1610	42	88,94	87,56	93	—	67	58	25	33
23H200	23	5F	1610	42	92,98	91,61	97	—	70	58	25	33
24H200	24	5F	1610	42	97,02	95,65	102	—	74	58	25	33
25H200	25	5F	1610	42	101,06	99,69	106	—	77	58	25	33
26H200	26	5F	1610	42	105,11	103,73	112	—	82	58	25	33
27H200	27	5F	1610	42	109,15	107,78	115	—	85	58	25	33
28H200	28	5F	1610	42	113,19	111,82	120	—	90	58	25	33
30H200	30	5F	1610	42	121,28	119,90	128	—	98	58	25	33
32H200	32	5F	2012	50	129,36	127,99	135	—	106	58	32	26
36H200	36	5WF	2012	50	145,53	144,16	150	102	121	58	32	26
40H200	40	5WF	2012	50	161,70	160,33	168	106	140	58	32	26
44H200	44	5WF	2012	50	177,87	176,50	184	106	150	58	32	26
48H200	48	5WF	2517	60	194,04	192,67	200	119	168	58	45	13
60H200	60	9A	2517	60	242,55	241,18	—	119	223	60	45	7,5
72H200	72	9A	2517	60	291,06	289,69	—	119	270	60	45	7,5
84H200	84	9A	2517	60	339,57	338,20	—	119	318	60	45	7,5
96H200	96	9A	2517	60	388,08	386,71	—	119	366	60	45	7,5
120H200	120	9A	2517	60	485,10	483,73	—	119	462	60	45	7,5

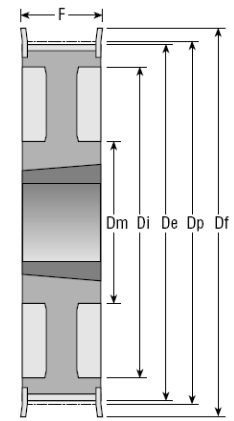


Style 3WF CI

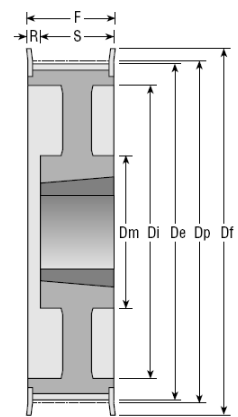


Style 5WF CI

**Imp Timing Pulleys -- H300 (For Belt - 12.7 Pitch x 76.2 Wide) 1/2"x 3"**

Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
20H300	20	4F	1615	42	80,85	79,48	87	—	65	84	38	23
21H300	21	4F	1615	42	84,89	83,52	91	—	65	84	38	23
22H300	22	4F	1615	42	88,94	87,56	93	—	67	84	38	23
23H300	23	4F	1615	42	92,98	91,61	97	—	70	84	38	23
24H300	24	4F	1615	42	97,02	95,65	102	—	74	84	38	23
25H300	25	4F	1615	42	101,06	99,69	106	—	77	84	38	23
26H300	26	4F	1615	42	105,11	103,73	112	—	82	84	38	23
27H300	27	4F	2012	50	109,15	107,78	115	—	85	84	32	26
28H300	28	4F	2012	50	113,19	111,82	120	—	90	84	32	26
30H300	30	4F	2012	50	121,28	119,90	128	—	98	84	32	26
32H300	32	4F	2517	60	129,36	127,99	135	—	106	84	45	19,5
36H300	36	4F	2517	60	145,53	144,16	150	—	121	84	45	19,5
40H300	40	4F	2517	60	161,70	160,33	168	—	138	84	45	19,5
44H300	44	4WF	2517	60	177,87	176,50	184	119	150	86	45	20,5
48H300	48	4WF	2517	60	194,04	192,67	200	119	168	86	45	20,5
60H300	60	9A	2517	60	242,55	241,18	—	119	223	86	45	20,5
72H300	72	9A	2517	60	291,06	289,69	—	119	270	86	45	20,5
84H300	84	9A	2517	60	339,57	338,20	—	119	318	86	45	20,5
96H300	96	9A	3030	75	388,08	386,71	—	150	366	86	76	5
120H300	120	9A	3030	75	485,10	483,73	—	150	462	86	76	5

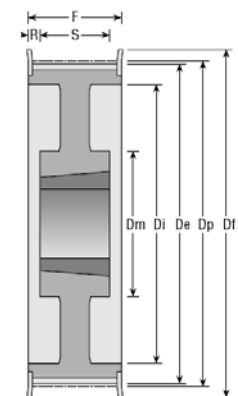

Style 4WF CI



Style 4F Steel




Imp Timing Pulleys -- **XH200** (For Belt - 22.225 Pitch x 50.8 Wide) 7/8"x 2"


Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18XH200	18	5F	2517	60	127,34	124,55	140	-	95	64	45	19
20XH200	20	5F	2517	60	141,49	138,69	154	-	110	64	45	19
22XH200	22	5F	2517	60	155,64	152,84	168	-	120	64	45	19
24XH200	24	5F	2517	60	169,79	166,99	184	-	135	64	45	19
26XH200	26	5F	2517	60	183,94	181,14	200	-	150	64	45	19
28XH200	28	4WF	2517	60	198,08	195,29	212	120	165	64	45	9,5
30XH200	30	4WF	2517	60	212,23	209,44	226	120	180	64	45	9,5
32XH200	32	4WF	2517	60	226,38	223,59	240	120	195	64	45	9,5
40XH200	40	4WF	3020	75	282,98	280,18	296	160	245	64	51	9,5
48XH200	48	9W	3020	75	339,57	336,78	-	160	300	64	51	6,5
60XH200	60	7A	3535	90	424,47	421,67	-	190	385	64	89	12,5
72XH200	72	7A	3535	90	509,4	506,56	-	190	470	64	89	12,5
84XH200	84	7A	3535	90	594,25	591,46	-	190	555	64	89	12,5
96XH200	96	7A	3535	90	679,15	676,35	-	190	640	64	89	12,5
120XH200	120	7A	3535	90	848,93	846,14	-	190	810	64	89	12,5

Imp Timing Pulleys -- **XH300** (For Belt - 22.225 Pitch x 76.2 Wide) 7/8"x 3"


Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18XH300	18	5F	2517	60	127,34	124,55	140	-	95	64	45	19
20XH300	20	5F	2517	60	141,49	138,69	154	-	110	64	45	19
22XH300	22	5F	2517	60	155,64	152,84	168	-	120	64	45	19
24XH300	24	5F	2517	60	169,79	166,99	184	-	135	64	45	19
26XH300	26	5F	2517	60	183,94	181,14	200	-	150	64	45	19
28XH300	28	5F	3020	75	198,08	195,29	212	-	165	64	45	9,5
30XH300	30	5F	3020	75	212,23	209,44	226	-	180	64	45	9,5
32XH300	32	5F	3020	75	226,38	223,59	240	-	195	64	45	9,5
40XH300	40	4WF	3020	75	282,98	280,18	296	160	245	64	51	9,5
48XH300	48	9A	3020	75	339,57	336,78	-	160	300	64	51	6,5
60XH300	60	9A	3535	90	424,47	421,67	-	190	385	64	89	12,5
72XH300	72	9A	3535	90	509,4	506,56	-	190	470	64	89	12,5
84XH300	84	7A	4040	100	594,25	591,46	-	190	555	64	89	12,5
96XH300	96	7A	4040	100	679,15	676,35	-	190	640	64	89	12,5
120XH300	120	7A	4040	100	848,93	846,14	-	190	810	64	89	12,5

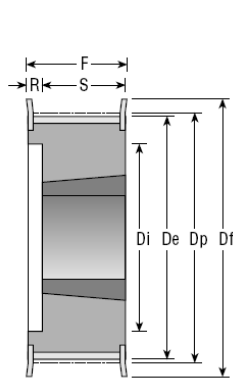

Style 5F Steel

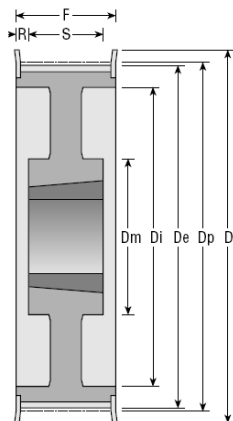


Style 4WF CI

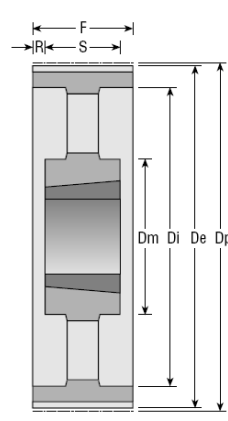


Style 9A CI

Imp Timing Pulleys -- **XH400** (For Belt - 22.225 Pitch x 101.6 Wide) 7/8"x 4"

Reference	Teeth	Style	Taper Bush	Max Bore	Dp	De	Df	Dm	Di	F	S	R
18XH400	18	5F	2517	60	127,34	124,55	140	-	95	64	45	19
20XH400	20	5F	2517	60	141,49	138,69	154	-	110	64	45	19
22XH400	22	5F	2517	60	155,64	152,84	168	-	120	64	45	19
24XH400	24	5F	3020	75	169,79	166,99	184	-	135	64	45	19
26XH400	26	5F	3020	75	183,94	181,14	200	-	150	64	45	19
28XH400	28	5F	3020	75	198,08	195,29	212	-	165	64	45	9,5
30XH400	30	5F	3020	75	212,23	209,44	226	-	180	64	45	9,5
32XH400	32	5F	3020	75	226,38	223,59	240	-	195	64	45	9,5
40XH400	40	4WF	3535	90	282,98	280,18	296	160	245	64	51	9,5
48XH400	48	9W	3535	90	339,57	336,78	-	160	300	64	51	6,5
60XH400	60	9A	4040	100	424,47	421,67	-	190	385	64	89	12,5
72XH400	72	9A	4040	100	509,4	506,56	-	190	470	64	89	12,5
84XH400	84	9A	4040	100	594,25	591,46	-	190	555	64	89	12,5
96XH400	96	9A	4040	100	679,15	676,35	-	190	640	64	89	12,5
120XH400	120	9A	4040	100	848,93	846,14	-	190	810	64	89	12,5

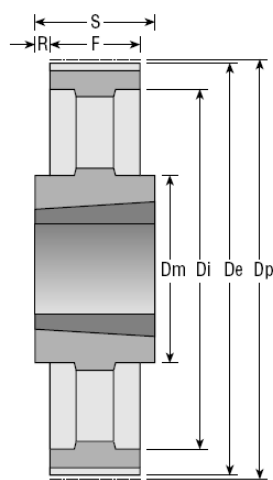

Style 7A CI

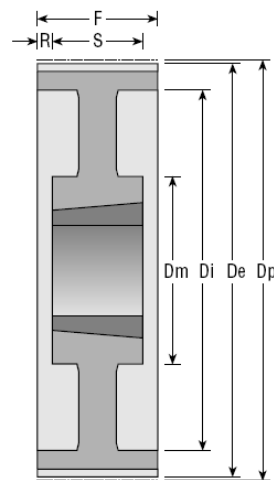


Style 9W CI



**Metric Timing Pulleys -- T2.5 (For Belt - 2.5mm Pitch x 6mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore d	Belt Width
16T2,5/10-2	10	MF	8,05	7,45	13	13	9	16	Solid	6
16T2,5/12-2	12	MF	9,6	9	13	13	9	16	Solid	6
16T2,5/14-2	14	MF	11,2	10,6	15	15	9	16	Solid	6
16T2,5/15-2	15	MF	12	11,4	15	15	9	16	Solid	6
16T2,5/16-2	16	MF	12,8	12,2	16	16	9	16	Solid	6
16T2,5/18-2	18	6F	14,4	13,8	17,5	10	10	16	Solid	6
16T2,5/19-2	19	6F	15,2	14,6	20	10	10	16	Solid	6
16T2,5/20-2	20	6F	16	15,4	20	11	10	16	Solid	6
16T2,5/22-2	22	6F	17,6	17	22	11	10	16	Solid	6
16T2,5/24-2	24	6F	19,15	18,55	22	12	10	16	4	6
16T2,5/25-2	25	6F	19,95	19,35	25	13	10	16	4	6
16T2,5/26-2	26	6F	20,75	20,15	26	14	10	16	4	6
16T2,5/28-2	28	6F	22,35	21,75	26	14	10	16	4	6
16T2,5/30-2	30	6F	23,95	23,35	26	16	10	16	6	6
16T2,5/32-2	32	6F	25,55	24,95	32	16	10	16	6	6
16T2,5/36-2	36	6F	28,75	28,1	36	20	10	16	6	6
16T2,5/40-2	40	6F	31,9	31,3	38	22	10	16	6	6
16T2,5/44-0	44	6	35,1	34,5	-	24	10	16	6	6
16T2,5/48-0	48	6	38,3	37,7	-	26	10	16	6	6
16T2,5/60-0	60	6	47,85	47,25	-	34	10	16	8	6

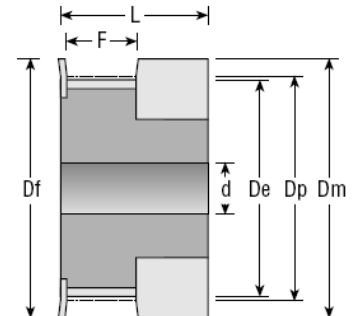


Style MF AL

**Metric Timing Pulleys -- T5 (For Belt - 5mm Pitch x 10mm Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore d	Belt Width
21T5/10-2	10	6F	16,05	15,05	19,5	8	15	21	Solid	10
21T5/12-2	12	6F	19,25	18,25	23	11	15	21	Solid	10
21T5/14-2	14	6F	22,45	21,45	25	13	15	21	Solid	10
21T5/15-2	15	6F	24,05	23,05	28	16	15	21	6	10
21T5/16-2	16	6F	25,06	24,6	32	18	15	21	6	10
21T5/18-2	18	6F	28,8	27,8	32	20	15	21	6	10
21T5/19-2	19	6F	30,4	29,4	36	22	15	21	6	10
21T5/20-2	20	6F	32	31	36	23	15	21	6	10
21T5/22-2	22	6F	35,15	34,15	38	24	15	21	6	10
21T5/24-2	24	6F	38,4	37,4	42	26	15	21	6	10
21T5/25-2	25	6F	39,95	38,95	44	26	15	21	6	10
21T5/26-2	26	6F	41,6	40,6	44	26	15	21	6	10
21T5/27-2	27	6F	43,2	42,2	48	30	15	21	8	10
21T5/28-2	28	6F	44,75	43,75	48	32	15	21	8	10
21T5/30-2	30	6F	47,95	46,95	51	34	15	21	8	10
21T5/32-2	32	6F	51,1	50,1	54	38	15	21	8	10
21T5/36-2	36	6F	57,45	56,45	64	38	15	21	8	10
21T5/40-2	40	6F	63,85	62,85	66,5	40	15	21	8	10
21T5/42-2	42	6F	67	66	70	40	15	21	8	10
21T5/44-0	44	6	70,2	69,2	-	45	15	21	8	10
21T5/48-0	48	6	76,55	75,55	-	50	15	21	8	10
21T5/60-0	60	6	95,65	94,65	-	65	15	21	8	10



Style 6F AL



Style 6 AL



**Metric Timing Pulleys -- T5 (For Belt - 5mm Pitch x 16mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
27T5/10-2	10	6F	16,05	15,05	19,5	8	21	27	Solid	16
27T5/12-2	12	6F	19,25	18,25	23	11	21	27	Solid	16
27T5/14-2	14	6F	22,45	21,45	25	13	21	27	Solid	16
27T5/15-2	15	6F	24,05	23,05	28	16	21	27	Solid	16
27T5/16-2	16	6F	25,06	24,6	32	18	21	27	6	16
27T5/18-2	18	6F	28,8	27,8	32	20	21	27	6	16
27T5/19-2	19	6F	30,4	29,4	36	22	21	27	6	16
27T5/20-2	20	6F	32	31	36	23	21	27	6	16
27T5/22-2	22	6F	35,15	34,15	38	24	21	27	6	16
27T5/24-2	24	6F	38,4	37,4	42	26	21	27	6	16
27T5/25-2	25	6F	39,95	38,95	44	26	21	27	6	16
27T5/26-2	26	6F	41,6	40,6	44	26	21	27	6	16
27T5/27-2	27	6F	43,2	42,2	48	30	21	27	8	16
27T5/28-2	28	6F	44,75	43,75	48	32	21	27	8	16
27T5/30-2	30	6F	47,95	46,95	51	34	21	27	8	16
27T5/32-2	32	6F	51,1	50,1	54	38	21	27	8	16
27T5/36-2	36	6F	57,45	56,45	64	38	21	27	8	16
27T5/40-2	40	6F	63,85	62,85	66,5	40	21	27	8	16
27T5/42-2	42	6F	67	66	70	40	21	27	8	16
27T5/44-0	44	6	70,2	69,2	-	45	21	27	8	16
27T5/48-0	48	6	76,55	75,55	-	50	21	27	8	16
27T5/60-0	60	6	95,65	94,65	-	65	21	27	8	16

**Metric Timing Pulleys -- T5 (For Belt - 5mm Pitch x 25 Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
36T5/10-2	10	6F	16,05	15,05	19,5	8	30	36	Solid	25
36T5/12-2	12	6F	19,25	18,25	23	11	30	36	Solid	25
36T5/14-2	14	6F	22,45	21,45	25	13	30	36	Solid	25
36T5/15-2	15	6F	24,05	23,05	28	16	30	36	6	25
36T5/16-2	16	6F	25,06	24,6	32	18	30	36	6	25
36T5/18-2	18	6F	28,8	27,8	32	20	30	36	6	25
36T5/19-2	19	6F	30,4	29,4	36	22	30	36	6	25
36T5/20-2	20	6F	32	31	36	23	30	36	6	25
36T5/22-2	22	6F	35,15	34,15	38	24	30	36	6	25
36T5/24-2	24	6F	38,4	37,4	42	26	30	36	8	25
36T5/25-2	25	6F	39,95	38,95	44	26	30	36	8	25
36T5/26-2	26	6F	41,6	40,6	44	26	30	36	8	25
36T5/27-2	27	6F	43,2	42,2	48	30	30	36	8	25
36T5/28-2	28	6F	44,75	43,75	48	32	30	36	8	25
36T5/30-2	30	6F	47,95	46,95	51	34	30	36	8	25
36T5/32-2	32	6F	51,1	50,1	54	38	30	36	8	25
36T5/36-2	36	6F	57,45	56,45	64	38	30	36	8	25
36T5/40-2	40	6F	63,85	62,85	66,5	40	30	36	8	25
36T5/42-2	42	6F	67	66	70	40	30	36	8	25
36T5/44-0	44	6	70,2	69,2	-	45	30	36	8	25
36T5/48-0	48	6	76,55	75,55	-	50	30	36	8	25
36T5/60-0	60	6	95,65	94,65	-	65	30	36	8	25

**Metric Timing Pulleys -- T10 (For Belt - 10mm Pitch x 16mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
31T10/12-2	12	6F	38,35	36,35	42	28	21	31	6	16
31T10/14-2	14	6F	44,7	42,7	48	32	21	31	8	16
31T10/15-2	15	6F	47,9	45,9	51	32	21	31	8	16
31T10/16-2	16	6F	51,1	49,1	54	35	21	31	8	16
31T10/18-2	18	6F	57,45	55,45	60	40	21	31	8	16
31T10/19-2	19	6F	60,65	58,65	66	44	21	31	8	16
31T10/20-2	20	6F	63,8	61,8	66	46	21	31	8	16
31T10/22-2	22	6F	70,2	68,2	75	52	21	31	8	16
31T10/24-2	24	6F	76,55	74,55	83	58	21	31	8	16
31T10/25-2	25	6F	79,75	77,75	83	60	21	31	8	16
31T10/26-2	26	6F	82,9	80,9	87	60	21	31	8	16
31T10/27-2	27	6F	86,1	84,1	91	60	21	31	8	16
31T10/28-2	28	6F	89,25	87,25	93	60	21	31	8	16
31T10/30-2	30	6F	95,65	93,65	97	60	21	31	8	16
31T10/32-2	32	6F	102	100	106	65	21	31	10	16
31T10/36-2	36	6F	114,75	112,75	119	70	21	31	10	16
31T10/40-2	40	6F	127,45	125,45	131	80	21	31	10	16
31T10/44-0	44	6	140,2	138,2	-	88	21	31	10	16
31T10/48-0	48	6	152,95	150,95	-	95	21	31	16	16
31T10/60-0	60	6	191,15	189,1	-	110	21	31	16	16



Style 6F AL

**Metric Timing Pulleys -- T10 (For Belt - 10mm Pitch x 25mm Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
40T10/12-2	12	6F	38,35	36,35	42	28	30	40	6	25
40T10/14-2	14	6F	44,7	42,7	48	32	30	40	8	25
40T10/15-2	15	6F	47,9	45,9	51	32	30	40	8	25
40T10/16-2	16	6F	51,1	49,1	54	35	30	40	8	25
40T10/18-2	18	6F	57,45	55,45	60	40	30	40	8	25
40T10/19-2	19	6F	60,65	58,65	66	44	30	40	8	25
40T10/20-2	20	6F	63,8	61,8	66	46	30	40	8	25
40T10/22-2	22	6F	70,2	68,2	75	52	30	40	8	25
40T10/24-2	24	6F	76,55	74,55	83	58	30	40	8	25
40T10/25-2	25	6F	79,75	77,75	83	60	30	40	8	25
40T10/26-2	26	6F	82,9	80,9	87	60	30	40	8	25
40T10/27-2	27	6F	86,1	84,1	91	60	30	40	8	25
40T10/28-2	28	6F	89,25	87,25	93	60	30	40	8	25
40T10/30-2	30	6F	95,65	93,65	97	60	30	40	8	25
40T10/32-2	32	6F	102	100	106	65	30	40	10	25
40T10/36-2	36	6F	114,75	112,75	119	70	30	40	10	25
40T10/40-2	40	6F	127,45	125,45	131	80	30	40	10	25
40T10/44-0	44	6	140,2	138,2	-	88	30	40	10	25
40T10/48-0	48	6	152,95	150,95	-	95	30	40	16	25
40T10/60-0	60	6	191,15	189,15	-	110	30	40	16	25



Style 6 AL



**Metric Timing Pulleys -- T10 (For Belt - 10mm Pitch x 32mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
47T10/18-2	18	6F	57,45	55,45	60	40	37	47	10	32
47T10/19-2	19	6F	60,65	58,6	66	44	37	47	10	32
47T10/20-2	20	6F	63,8	61,8	66	46	37	47	12	32
47T10/22-2	22	6F	70,2	68,2	75	52	37	47	12	32
47T10/24-2	24	6F	76,55	74,55	83	58	37	47	12	32
47T10/25-2	25	6F	79,75	77,75	83	60	37	47	12	32
47T10/26-2	26	6F	82,9	80,9	87	60	37	47	12	32
47T10/27-2	27	6F	86,1	84,1	91	60	37	47	12	32
47T10/28-2	28	6F	89,25	87,25	93	60	37	47	12	32
47T10/30-2	30	6F	95,65	93,65	97	60	37	47	12	32
47T10/32-2	32	6F	102	100	106	65	37	47	12	32
47T10/36-2	36	6F	114,75	112,75	119	70	37	47	16	32
47T10/40-2	40	6F	127,45	125,45	131	80	37	47	16	32
47T10/44-0	44	6	140,2	138,2	-	88	37	47	16	32
47T10/48-0	48	6	152,95	150,95	-	95	37	47	16	32
47T10/60-0	60	6	191,1	189	-	110	37	47	16	32

**Metric Timing Pulleys -- T10 (For Belt - 10mm Pitch x 50mm Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
66T10/18-2	18	6F	57,45	55,45	60	40	56	66	10	50
66T10/19-2	19	6F	60,65	58,65	66	44	56	66	10	50
66T10/20-2	20	6F	63,8	61,8	66	46	56	66	12	50
66T10/22-2	22	6F	70,2	68,2	75	52	56	66	12	50
66T10/24-2	24	6F	76,55	74,55	83	58	56	66	12	50
66T10/25-2	25	6F	79,75	77,7	83	60	56	66	12	50
66T10/26-2	26	6F	82,9	80,9	87	60	56	66	12	50
66T10/27-2	27	6F	86,1	84,1	91	60	56	66	12	50
66T10/28-2	28	6F	89,25	87,25	93	60	56	66	12	50
66T10/30-2	30	6F	95,65	93,65	97	60	56	66	12	50
66T10/32-2	32	6F	102	100	106	65	56	66	12	50
66T10/36-2	36	6F	114,75	112,75	119	70	56	66	16	50
66T10/40-2	40	6F	127,45	125,45	131	80	56	66	16	50
66T10/44-0	44	6	140,2	138,2	-	88	56	66	16	50
66T10/48-0	48	6	152,95	150,95	-	95	56	66	16	50
66T10/60-0	60	6	191,1	189,1	-	110	56	66	16	50

**Metric Timing Belt Pulleys -- AT5 (For Belt - 5mm Pitch x 10mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore d	Belt Width
21AT5/12-2	12	6F	19,01	17,85	23,0	10	15	21	Solid	10
21AT5/14-2	14	6F	22,29	21,05	25,0	13	15	21	Solid	10
21AT5/15-2	15	6F	23,88	22,65	28,0	16	15	21	6	10
21AT5/16-2	16	6F	25,47	24,20	32,0	18	15	21	6	10
21AT5/18-2	18	6F	28,65	27,40	32,0	19	15	21	6	10
21AT5/19-2	19	6F	30,25	29,00	36,0	22	15	21	6	10
21AT5/20-2	20	6F	31,83	30,60	36,0	23	15	21	6	10
21AT5/22-2	22	6F	35,12	33,85	38,0	24	15	21	6	10
21AT5/24-2	24	6F	38,21	37,00	42,0	26	15	21	6	10
21AT5/25-2	25	6F	39,80	38,60	44,0	26	15	21	6	10
21AT5/26-2	26	6F	41,47	40,20	44,0	26	15	21	6	10
21AT5/27-2	27	6F	42,98	41,80	48,0	30	15	21	8	10
21AT5/28-2	28	6F	44,62	43,35	48,0	32	15	21	8	10
21AT5/30-2	30	6F	47,76	46,55	51,0	34	15	21	8	10
21AT5/32-2	32	6F	50,94	49,70	54,0	38	15	21	8	10
21AT5/36-2	36	6F	57,31	56,05	63,0	38	15	21	8	10
21AT5/40-2	40	6F	63,66	62,45	66,0	40	15	21	8	10
21AT5/42-2	42	6F	66,87	65,60	71,0	40	15	21	8	10
21AT5/44-0	44	6	70,07	68,80	—	45	15	21	8	10
21AT5/48-0	48	6	76,42	75,15	—	50	15	21	8	10
21AT5/60-0	60	6	95,52	94,25	—	65	15	21	8	10



Style 6F AL

**Metric Timing Belt Pulleys -- AT5 (For Belt - 5mm Pitch x 16mm Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
27AT5/12-2	12	6F	19,01	17,85	23,0	10	21	27	Solid	16
27AT5/14-2	14	6F	22,29	21,05	25,0	13	21	27	Solid	16
27AT5/15-2	15	6F	23,88	22,65	28,0	16	21	27	6	16
27AT5/16-2	16	6F	25,47	24,20	32,0	18	21	27	6	16
27AT5/18-2	18	6F	28,65	27,40	32,0	19	21	27	6	16
27AT5/19-2	19	6F	30,25	29,00	36,0	22	21	27	6	16
27AT5/20-2	20	6F	31,83	30,60	36,0	23	21	27	6	16
27AT5/22-2	22	6F	35,12	33,85	38,0	24	21	27	6	16
27AT5/24-2	24	6F	38,21	37,00	42,0	26	21	27	6	16
27AT5/25-2	25	6F	39,80	38,60	44,0	26	21	27	6	16
27AT5/26-2	26	6F	41,47	40,20	44,0	26	21	27	6	16
27AT5/27-2	27	6F	42,98	41,80	48,0	30	21	27	8	16
27AT5/28-2	28	6F	44,62	43,35	48,0	32	21	27	8	16
27AT5/30-2	30	6F	47,76	46,55	51,0	34	21	27	8	16
27AT5/32-2	32	6F	50,94	49,70	54,0	38	21	27	8	16
27AT5/36-2	36	6F	57,31	56,05	63,0	38	21	27	8	16
27AT5/40-2	40	6F	63,66	62,45	66,0	40	21	27	8	16
27AT5/42-2	42	6F	66,87	65,60	71,0	40	21	27	8	16
27AT5/44-0	44	6	70,07	68,80	—	45	21	27	8	16
27AT5/48-0	48	6	76,42	75,15	—	50	21	27	8	16
27AT5/60-0	60	6	95,52	94,25	—	65	21	27	8	16



Style 6 AL

**Metric Timing Belt Pulleys -- AT5 (For Belt - 5mm Pitch x 25mm Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
36AT5/12-2	12	6F	19,01	17,85	23,0	10	30	36	—	25
36AT5/14-2	14	6F	22,29	21,05	25,0	13	30	36	—	25
36AT5/15-2	15	6F	23,88	22,65	28,0	16	30	36	6	25
36AT5/16-2	16	6F	25,47	24,20	32,0	18	30	36	6	25
36AT5/18-2	18	6F	28,65	27,40	32,0	19	30	36	6	25
36AT5/19-2	19	6F	30,25	29,00	36,0	22	30	36	6	25
36AT5/20-2	20	6F	31,83	30,60	36,0	23	30	36	6	25
36AT5/22-2	22	6F	35,12	33,85	38,0	24	30	36	6	25
36AT5/24-2	24	6F	38,21	37,00	42,0	26	30	36	8	25
36AT5/25-2	25	6F	39,80	38,60	44,0	26	30	36	8	25
36AT5/26-2	26	6F	41,47	40,20	44,0	26	30	36	8	25
36AT5/27-2	27	6F	42,98	41,80	48,0	30	30	36	8	25
36AT5/28-2	28	6F	44,62	43,35	48,0	32	30	36	8	25
36AT5/30-2	30	6F	47,76	46,55	51,0	34	30	36	8	25
36AT5/32-2	32	6F	50,94	49,70	54,0	38	30	36	8	25
36AT5/36-2	36	6F	57,31	56,05	63,0	38	30	36	8	25
36AT5/40-2	40	6F	63,66	62,45	66,0	40	30	36	8	25
36AT5/42-2	42	6F	66,87	65,60	71,0	40	30	36	8	25
36AT5/44-0	44	6	70,07	68,80	—	45	30	36	8	25
36AT5/48-0	48	6	76,42	75,15	—	50	30	36	8	25
36AT5/60-0	60	6	95,52	94,25	—	65	30	36	8	25

# POWER




# TRANSMISSION



- From Hooper**
- Gearboxes
  - Electric Motors
  - Inverters
  - Flexible Couplings
  - Conveyor Belting
  - Transmission Chain Drives
  - Conveyor Chain Drives
  - Table Top Chain Drives
  - Leaf Chains
  - Torque Limiters

**Metric Timing Belt Pulleys -- AT10 (For Belt - 10mm Pitch x 16mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
31AT10/15-2	15	6F	47,75	45,90	51	32	21	31	8	16
31AT10/16-2	16	6F	50,93	49,05	54	35	21	31	8	16
31AT10/18-2	18	6F	57,29	55,45	60	40	21	31	8	16
31AT10/19-2	19	6F	60,48	58,60	66	44	21	31	8	16
31AT10/20-2	20	6F	63,66	61,80	66	46	21	31	8	16
31AT10/22-2	22	6F	70,03	68,15	75	52	21	31	8	16
31AT10/24-2	24	6F	76,39	74,55	83	58	21	31	8	16
31AT10/25-2	25	6F	79,58	77,70	83	60	21	31	8	16
31AT10/26-2	26	6F	82,76	80,90	87	60	21	31	8	16
31AT10/27-2	27	6F	85,95	84,10	91	60	21	31	8	16
31AT10/28-2	28	6F	89,13	87,25	93	60	21	31	8	16
31AT10/30-2	30	6F	95,49	93,65	97	60	21	31	8	16
31AT10/32-2	32	6F	101,86	100,00	106	65	21	31	10	16
31AT10/36-2	36	6F	114,59	112,75	119	70	21	31	10	16
31AT10/40-2	40	6F	127,32	125,45	131	80	21	31	10	16
31AT10/44-0	44	6	140,06	138,20	—	88	21	31	10	16
31AT10/48-0	48	6	152,78	150,95	—	95	21	31	16	16
31AT10/60-0	60	6	190,98	189,10	—	110	21	31	16	16



Style 6F AL

**Metric Timing Belt Pulleys -- AT10 (For Belt - 10mm Pitch x 25mm Wide)**

Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
40AT10/15-2	15	6F	47,75	45,90	51	32	30	40	8	25
40AT10/16-2	16	6F	50,93	49,05	54	35	30	40	8	25
40AT10/18-2	18	6F	57,29	55,45	60	40	30	40	8	25
40AT10/19-2	19	6F	60,48	58,60	66	44	30	40	8	25
40AT10/20-2	20	6F	63,66	61,80	66	46	30	40	8	25
40AT10/22-2	22	6F	70,03	68,15	75	52	30	40	8	25
40AT10/24-2	24	6F	76,39	74,55	83	58	30	40	8	25
40AT10/25-2	25	6F	79,58	77,70	83	60	30	40	8	25
40AT10/26-2	26	6F	82,76	80,90	87	60	30	40	8	25
40AT10/27-2	27	6F	85,95	84,10	91	60	30	40	8	25
40AT10/28-2	28	6F	89,13	87,25	93	60	30	40	8	25
40AT10/30-2	30	6F	95,49	93,65	97	60	30	40	8	25
40AT10/32-2	32	6F	101,86	100,00	106	65	30	40	10	25
40AT10/36-2	36	6F	114,59	112,75	119	70	30	40	10	25
40AT10/40-2	40	6F	127,32	125,45	131	80	30	40	10	25
40AT10/44-0	44	6	140,06	138,20	—	88	30	40	10	25
40AT10/48-0	48	6	152,78	150,95	—	95	30	40	16	25
40AT10/60-0	60	6	190,98	189,10	—	110	30	40	16	25



Style 6 AL



**Metric Timing Belt Pulleys -- AT10 (For Belt - 10mm Pitch x 32mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
47AT10/18-2	18	6F	57,29	55,45	60	40	37	47	10	32
47AT10/19-2	19	6F	60,48	58,60	66	44	37	47	10	32
47AT10/20-2	20	6F	63,66	61,80	66	46	37	47	12	32
47AT10/22-2	22	6F	70,03	68,15	75	52	37	47	12	32
47AT10/24-2	24	6F	76,39	74,55	83	58	37	47	12	32
47AT10/25-2	25	6F	79,58	77,70	83	60	37	47	12	32
47AT10/26-2	26	6F	82,76	80,90	87	60	37	47	12	32
47AT10/27-2	27	6F	85,95	84,10	91	60	37	47	12	32
47AT10/28-2	28	6F	89,13	87,25	93	60	37	47	12	32
47AT10/30-2	30	6F	95,49	93,65	97	60	37	47	12	32
47AT10/32-2	32	6F	101,86	100,00	106	65	37	47	12	32
47AT10/36-2	36	6F	114,59	112,75	119	70	37	47	16	32
47AT10/40-2	40	6F	127,32	125,45	131	80	37	47	16	32
47AT10/44-0	44	6	140,06	138,20	—	88	37	47	16	32
47AT10/48-0	48	6	152,78	150,95	—	95	37	47	16	32
47AT10/60-0	60	6	190,98	189,10	—	110	37	47	16	32

**Metric Timing Belt Pulleys -- AT10 (For Belt - 10mm Pitch x 50mm Wide)**


Reference	Teeth	Style	Dp	De	Df	Dm	F	L	Bore	Belt Width
66AT10/18-2	18	6F	57,29	55,45	60	40	56	66	10	50
66AT10/19-2	19	6F	60,48	58,60	66	44	56	66	10	50
66AT10/20-2	20	6F	63,66	61,80	66	46	56	66	12	50
66AT10/22-2	22	6F	70,03	68,15	75	52	56	66	12	50
66AT10/24-2	24	6F	76,39	74,55	83	58	56	66	12	50
66AT10/25-2	25	6F	79,58	77,70	83	60	56	66	12	50
66AT10/26-2	26	6F	82,76	80,90	87	60	56	66	12	50
66AT10/27-2	27	6F	85,95	84,10	91	60	56	66	12	50
66AT10/28-2	28	6F	89,13	87,25	93	60	56	66	12	50
66AT10/30-2	30	6F	95,49	93,65	97	60	56	66	12	50
66AT10/32-2	32	6F	101,86	100,00	106	65	56	66	12	50
66AT10/36-2	36	6F	114,59	112,75	119	70	56	66	16	50
66AT10/40-2	40	6F	127,32	125,45	131	80	56	66	16	50
66AT10/44-0	44	6	140,06	138,20	—	88	56	66	16	50
66AT10/48-0	48	6	152,78	150,95	—	95	56	66	16	50
66AT10/60-0	60	6	190,98	189,10	—	110	56	66	16	50




# Pilot Bore Metric Timing Pulleys ( For Omega and HTD belts )

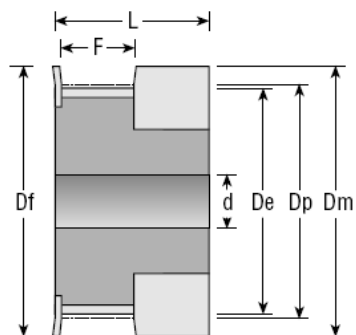

Style 1F Solid Bore

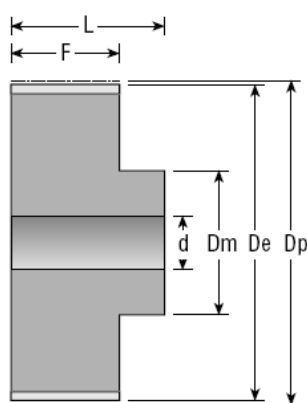


Style 6

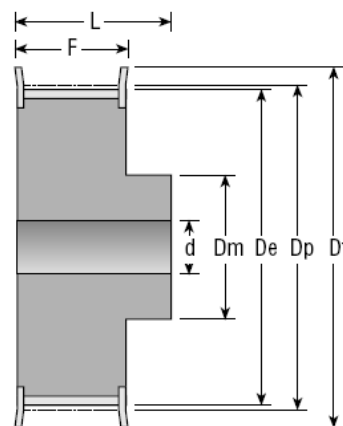


Style 6F

### Materials


- Al Aluminium
- St Steel
- CI Cast Iron

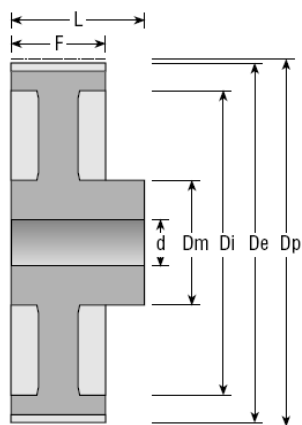


Style 6W

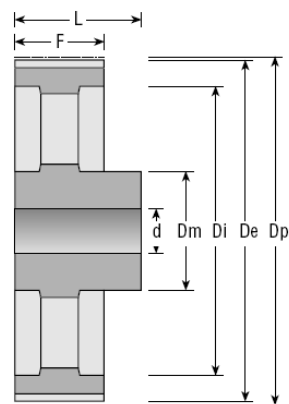


Style 6A

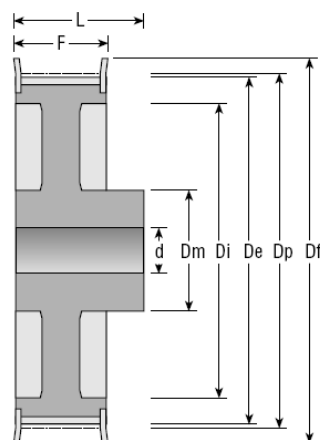

Style 6WF

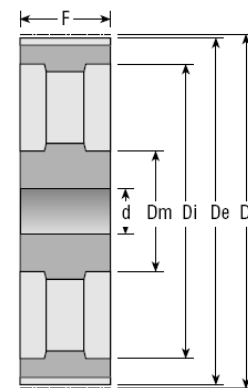

Style 10A

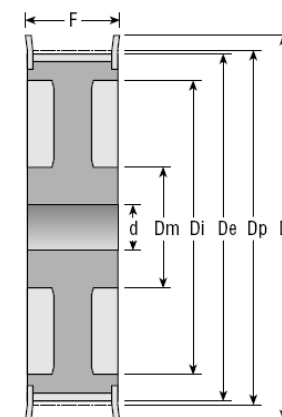

Style 10WF



**Metric Timing Belt Pulleys -- 3M (For Omega and HTD Belts ) Pilot Bore & Solid**

Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
10-3M-6MMPB	10	6	Al	1F	9,55	8,79	13,0	13,0	-	7,2	14,5	Solid	3
10-3M-9MMPB		9	Al	1F	9,55	8,79	13,0	13,0	-	10,2	17,5	Solid	3
10-3M-15MMPB		15	Al	1F	9,55	8,79	13,0	13,0	-	17,0	26	Solid	3
12-3M-6MMPB	12	6	Al	1F	11,46	10,70	15,0	15,0	-	7,2	14,5	Solid	5
12-3M-9MMPB		9	Al	1F	11,46	10,70	15,0	15,0	-	10,2	17,5	Solid	5
12-3M-15MMPB		15	Al	1F	11,46	10,70	15,0	15,0	-	17,0	26	Solid	5
14-3M-6MMPB	14	6	Al	1F	13,37	12,61	16,0	16,0	-	7,2	14,5	Solid	6
14-3M-9MMPB		9	Al	1F	13,37	12,61	16,0	16,0	-	10,2	17,5	Solid	6
14-3M-15MMPB		15	Al	1F	13,37	12,61	16,0	16,0	-	17,0	26	Solid	6
15-3M-6MMPB	15	6	Al	1F	14,32	13,56	17,5	17,5	-	7,2	14,5	Solid	6
15-3M-9MMPB		9	Al	1F	14,32	13,56	17,5	17,5	-	10,2	17,5	Solid	6
15-3M-15MMPB		15	Al	1F	14,32	13,56	17,5	17,5	-	17,0	26	Solid	6
16-3M-6MMPB	16	6	Al	6F	15,28	14,52	18,0	10,0	-	9,8	17,5	4	7
16-3M-9MMPB		9	Al	6F	15,28	14,52	18,0	10,0	-	12,8	20,6	4	7
16-3M-15MMPB		15	Al	6F	15,28	14,52	18,0	10,0	-	19,5	26	4	7
18-3M-6MMPB	18	6	Al	6F	17,19	16,43	19,5	11,0	-	9,8	17,5	6	8
18-3M-9MMPB		9	Al	6F	17,19	16,43	19,5	11,0	-	12,8	20,6	6	8
18-3M-15MMPB		15	Al	6F	17,19	16,43	19,5	11,0	-	19,5	26	6	8
20-3M-6MMPB	20	6	Al	6F	19,10	18,34	23,0	13,0	-	9,8	17,5	6	9
20-3M-9MMPB		9	Al	6F	19,10	18,34	23,0	13,0	-	12,8	20,6	6	9
20-3M-15MMPB		15	Al	6F	19,10	18,34	23,0	13,0	-	19,5	26	6	9
21-3M-6MMPB	21	6	Al	6F	20,05	19,29	25,0	14,0	-	9,8	17,5	6	9
21-3M-9MMPB		9	Al	6F	20,05	19,29	25,0	14,0	-	12,8	20,6	6	9
21-3M-15MMPB		15	Al	6F	20,05	19,29	25,0	14,0	-	19,5	26	6	9
22-3M-6MMPB	22	6	Al	6F	21,01	20,25	25,0	14,0	-	9,8	17,5	6	9
22-3M-9MMPB		9	Al	6F	21,01	20,25	25,0	14,0	-	12,8	20,6	6	9
22-3M-15MMPB		15	Al	6F	21,01	20,25	25,0	14,0	-	19,5	26	6	9
24-3M-6MMPB	24	6	Al	6F	22,92	22,16	25,0	14,0	-	9,8	17,5	6	9
24-3M-9MMPB		9	Al	6F	22,92	22,16	25,0	14,0	-	12,8	20,6	6	9
24-3M-15MMPB		15	Al	6F	22,92	22,16	25,0	14,0	-	19,5	26	6	9

Metric Timing Belt Pulleys -- 3M (For Omega and HTD Belts ) Pilot Bore



Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
26-3M-6MMPB	26	6	Al	6F	24,83	24,07	28,0	16,0	-	9,8	17,5	6	11
26-3M-9MMPB		9	Al	6F	24,83	24,07	28,0	16,0	-	12,8	20,6	6	11
26-3M-15MMPB		15	Al	6F	24,83	24,07	28,0	16,0	-	19,5	26	6	11
28-3M-6MMPB	28	6	Al	6F	26,74	25,98	32,0	18,0	-	9,8	17,5	6	12
28-3M-9MMPB		9	Al	6F	26,74	25,98	32,0	18,0	-	12,8	20,6	6	12
28-3M-15MMPB		15	Al	6F	26,74	25,98	32,0	18,0	-	19,5	26	6	12
30-3M-6MMPB	30	6	Al	6F	28,65	27,89	32,0	20,0	-	9,8	17,5	6	14
30-3M-9MMPB		9	Al	6F	28,65	27,89	32,0	20,0	-	12,8	20,6	6	14
30-3M-15MMPB		15	Al	6F	28,65	27,89	32,0	20,0	-	19,5	26	6	14
32-3M-6MMPB	32	6	Al	6F	30,56	29,80	36,0	22,0	-	9,8	17,5	6	15
32-3M-9MMPB		9	Al	6F	30,56	29,80	36,0	22,0	-	12,8	20,6	6	15
32-3M-15MMPB		15	Al	6F	30,56	29,80	36,0	22,0	-	19,5	26	6	15
36-3M-6MMPB	36	6	Al	6F	34,38	33,62	38,0	26,0	-	10,3	18,0	6	16
36-3M-9MMPB		9	Al	6F	34,38	33,62	38,0	26,0	-	13,4	22,2	6	16
36-3M-15MMPB		15	Al	6F	34,38	33,62	38,0	26,0	-	20,0	30	6	16
40-3M-6MMPB	40	6	Al	6F	38,20	37,44	42,0	28,0	-	10,3	18,0	6	18
40-3M-9MMPB		9	Al	6F	38,20	37,44	42,0	28,0	-	13,4	22,2	6	18
40-3M-15MMPB		15	Al	6F	38,20	37,44	42,0	28,0	-	20,0	30	6	18
44-3M-6MMPB	44	6	Al	6F	42,02	41,26	48,0	33,0	-	10,3	18,0	6	20
44-3M-9MMPB		9	Al	6F	42,02	41,26	48,0	33,0	-	13,4	22,2	6	20
44-3M-15MMPB		15	Al	6F	42,02	41,26	48,0	33,0	-	20,0	30	6	20
48-3M-6MMPB	48	6	Al	6	45,84	45,08	-	33,0	-	10,3	18,6	8	20
48-3M-9MMPB		9	Al	6	45,84	45,08	-	33,0	-	13,4	22,2	8	20
48-3M-15MMPB		15	Al	6	45,84	45,08	-	33,0	-	20,0	30	8	20
60-3M-6MMPB	60	6	Al	6	57,30	56,54	-	33,0	-	10,3	18,6	8	20
60-3M-9MMPB		9	Al	6	57,30	56,54	-	33,0	-	13,4	22,2	8	20
60-3M-15MMPB		15	Al	6	57,30	56,54	-	33,0	-	20,0	30	8	20
72-3M-6MMPB	72	6	Al	6	68,75	67,99	-	33,0	-	10,3	18,6	8	20
72-3M-9MMPB		9	Al	6	68,75	67,99	-	33,0	-	13,4	22,2	8	20
72-3M-15MMPB		15	Al	6	68,75	67,99	-	33,0	-	20,0	30	8	20



**Metric Timing Belt Pulleys -- 5M (For Omega and HTD Belts ) Pilot Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
12-5M-9MMPB	12	9	St	6F	19,10	17,96	23	13,0	-	14,5	20,0	4	7
12-5M-15MMPB		15	St	6F	19,10	17,96	25	13,0	-	20,5	26	4	7
12-5M-25MMPB		25	St	6F	19,10	17,96	25	13,0	-	30	36	4	7
14-5M-9MMPB	14	9	St	6F	22,28	21,14	25	14,0	-	14,5	20,0	6	8
14-5M-15MMPB		15	St	6F	22,28	21,14	25	14,0	-	20,5	26	6	8
14-5M-25MMPB		25	St	6F	22,28	21,14	25	14,0	-	30	36	6	8
15-5M-9MMPB	15	9	St	6F	23,87	22,73	28	16,0	-	14,5	20,0	6	10
15-5M-15MMPB		15	St	6F	23,87	22,73	28	16,0	-	20,5	26	6	10
15-5M-25MMPB		25	St	6F	23,87	22,73	28	16,0	-	30	36	6	10
16-5M-9MMPB	16	9	St	6F	25,46	24,32	28	16,5	-	14,5	20,0	6	10
16-5M-15MMPB		15	St	6F	25,46	24,32	28	16,5	-	20,5	26	6	10
16-5M-25MMPB		25	St	6F	25,46	24,32	28	16,5	-	30	36	6	10
18-5M-9MMPB	18	9	St	6F	28,65	27,51	32	20,0	-	14,5	20,0	6	12
18-5M-15MMPB		15	St	6F	28,65	27,51	32	20,0	-	20,5	26	6	12
18-5M-25MMPB		25	St	6F	28,65	27,51	32	20,0	-	30	36	6	12
20-5M-9MMPB	20	9	St	6F	31,83	30,69	36	23,0	-	14,5	22,5	6	14
20-5M-15MMPB		15	St	6F	31,83	30,69	36	23,0	-	20,5	26	6	14
20-5M-25MMPB		25	St	6F	31,83	30,69	36	23,0	-	30	36	6	14
21-5M-9MMPB	21	9	St	6F	33,42	32,28	38	24,0	-	14,5	22,5	6	14
21-5M-15MMPB		15	St	6F	33,42	32,28	38	24,0	-	20,5	26	6	14
21-5M-25MMPB		25	St	6F	33,42	32,28	38	24,0	-	30	38	6	14
22-5M-9MMPB	22	9	St	6F	35,01	33,87	38	25,5	-	14,5	22,5	6	14
22-5M-15MMPB		15	St	6F	35,01	33,87	38	25,5	-	20,5	26	6	14
22-5M-25MMPB		25	St	6F	35,01	33,87	38	25,5	-	30	38	6	14
24-5M-9MMPB	24	9	St	6F	38,20	37,06	42	27,0	-	14,5	22,5	6	16
24-5M-15MMPB		15	St	6F	38,20	37,06	42	27,0	-	20,5	28	6	16
24-5M-25MMPB		25	St	6F	38,20	37,06	42	27,0	-	30	38	6	16



**Metric Timing Belt Pulleys -- 5M (For Omega and HTD Belts ) Pilot Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
26-5M-9MMPB	26	9	St	6F	41,38	40,24	44	30,0	-	14,5	22,5	6	18
26-5M-15MMPB		15	St	6F	41,38	40,24	44	30,0	-	20,5	28	6	18
26-5M-25MMPB		25	St	6F	41,38	40,24	44	30,0	-	30	38	6	18
28-5M-9MMPB	28	9	St	6F	44,56	43,42	48	30,5	-	14,5	22,5	6	18
28-5M-15MMPB		15	St	6F	44,56	43,42	48	30,5	-	20,5	28	6	18
28-5M-25MMPB		25	St	6F	44,56	43,42	48	30,5	-	30	38	6	18
30-5M-9MMPB	30	9	St	6F	47,75	46,61	51	35,0	-	14,5	22,5	6	20
30-5M-15MMPB		15	St	6F	47,75	46,61	51	35,0	-	20,5	28	6	20
30-5M-25MMPB		25	St	6F	47,75	46,61	51	35,0	-	30	38	6	20
32-5M-9MMPB	32	9	St	6F	50,93	49,79	54	38,0	-	14,5	22,5	8	22
32-5M-15MMPB		15	St	6F	50,93	49,79	54	38,0	-	20,5	28	8	22
32-5M-25MMPB		25	St	6F	50,93	49,79	54	38,0	-	30	38	8	22
36-5M-9MMPB	36	9	St	6F	57,30	56,16	60	38,0	-	14,5	22,5	8	22
36-5M-15MMPB		15	St	6F	57,30	56,16	60	38,0	-	20,5	28	8	22
36-5M-25MMPB		25	St	6F	57,30	56,16	60	38,0	-	30	38	8	22
40-5M-9MMPB	40	9	St	6F	63,66	62,52	71	38,0	-	14,5	22,5	8	22
40-5M-15MMPB		15	St	6F	63,66	62,52	71	38,0	-	20,5	28	8	22
40-5M-25MMPB		25	St	6F	63,66	62,52	71	38,0	-	30	38	8	22
44-5M-9MMPB	44	9	Al	6W	70,03	68,89	-	38,0	54	14,5	25,5	8	22
44-5M-15MMPB		15	Al	6W	70,03	68,89	-	38,0	54	20,5	30	8	22
44-5M-25MMPB		25	Al	6W	70,03	68,89	-	38,0	54	30	40	8	22
48-5M-9MMPB	48	9	Al	6W	76,39	75,25	-	45,0	61	14,5	25,5	8	25
48-5M-15MMPB		15	Al	6W	76,39	75,25	-	38,0	61	20,5	30	8	25
48-5M-25MMPB		25	Al	6W	76,39	75,25	-	38,0	61	30	40	8	25
60-5M-9MMPB	60	9	Al	6W	95,49	94,35	-	45,0	80	14,5	25,5	8	25
60-5M-15MMPB		15	Al	6W	95,49	94,35	-	50,0	80	20,5	30	8	25
60-5M-25MMPB		25	Al	6W	95,49	94,35	-	50,0	80	30	40	8	25
72-5M-9MMPB	72	9	Al	6W	114,59	113,45	-	45,0	100	14,5	25,5	8	25
72-5M-15MMPB		15	Al	6W	114,59	113,45	-	50,0	100	20,5	30	8	25
72-5M-25MMPB		25	Al	6W	114,59	113,45	-	50,0	100	30	40	8	25



**Metric Timing Belt Pulleys -- 8M (For Omega and HTD Belts ) Pilot Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
24-8M-20MMPB	24	20	St	6F	61,12	59,75	66,0	45	-	28	38	12	30
24-8M-30MMPB		30	St	6F	61,12	59,75	66,0	45	-	38	48	12	30
24-8M-50MMPB		50	St	6F	61,12	59,75	66,0	45	-	60	70	12	30
24-8M-85MMPB		85	St	6F	61,12	59,75	66,0	45	-	95	105	12	30
26-8M-20MMPB	26	20	St	6F	66,21	64,84	71,0	50	-	28	38	12	35
26-8M-30MMPB		30	St	6F	66,21	64,84	71,0	50	-	38	48	12	35
26-8M-50MMPB		50	St	6F	66,21	64,84	71,0	50	-	60	70	12	35
26-8M-85MMPB		85	St	6F	66,21	64,84	71,0	50	-	95	105	12	35
28-8M-20MMPB	28	20	St	6F	71,30	70,08	75,0	50	-	28	38	15	35
28-8M-30MMPB		30	St	6F	71,30	70,08	75,0	50	-	38	48	15	35
28-8M-50MMPB		50	St	6F	71,30	70,08	75,0	50	-	60	70	15	35
28-8M-85MMPB		85	St	6F	71,30	70,08	75,0	50	-	95	105	15	35
30-8M-20MMPB	30	20	St	6F	76,39	75,13	83,0	55	-	28	38	15	35
30-8M-30MMPB		30	St	6F	76,39	75,13	83,0	55	-	38	48	15	35
30-8M-50MMPB		50	St	6F	76,39	75,13	83,0	55	-	60	70	15	35
30-8M-85MMPB		85	St	6F	76,39	75,13	83,0	55	-	95	105	15	35
32-8M-20MMPB	32	20	St	6F	81,49	80,16	87,0	60	-	28	38	15	40
32-8M-30MMPB		30	St	6F	81,49	80,16	87,0	60	-	38	48	15	40
32-8M-50MMPB		50	St	6F	81,49	80,16	87,0	60	-	60	70	15	40
32-8M-85MMPB		85	St	6F	81,49	80,16	87,0	60	-	95	105	15	40
34-8M-20MMPB	34	20	St	6F	86,58	85,22	91,0	70	-	28	38	15	45
34-8M-30MMPB		30	St	6F	86,58	85,22	91,0	70	-	38	48	15	45
34-8M-50MMPB		50	St	6F	86,58	85,22	91,0	70	-	60	70	15	45
34-8M-85MMPB		85	St	6F	86,58	85,22	91,0	70	-	95	105	15	45
36-8M-20MMPB	36	20	St	6F	91,67	90,30	98,5	70	-	28	38	15	45
36-8M-30MMPB		30	St	6F	91,67	90,30	98,5	70	-	38	48	15	45
36-8M-50MMPB		50	St	6F	91,67	90,30	98,5	70	-	60	70	15	45
36-8M-85MMPB		85	St	6F	91,67	90,30	98,5	70	-	95	105	15	45



**Metric Timing Belt Pulleys -- 8M (For Omega and HTD Belts ) Pilot Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
38-8M-20MMPB	38	20	St	6F	96,77	95,39	103,0	75	-	28	38	15	45
38-8M-30MMPB		30	St	6F	96,77	95,39	103,0	75	-	38	48	15	45
38-8M-50MMPB		50	St	6F	96,77	95,39	103,0	75	-	60	70	15	45
38-8M-85MMPB		85	St	6F	96,77	95,39	103,0	75	-	95	105	15	45
40-8M-20MMPB	40	20	Cl	6F	101,86	100,49	106,0	75	-	28	38	15	45
40-8M-30MMPB		30	Cl	6F	101,86	100,49	106,0	75	-	38	48	15	45
40-8M-50MMPB		50	Cl	6F	101,86	100,49	106,0	75	-	60	70	18	45
40-8M-85MMPB		85	Cl	6F	101,86	100,49	106,0	75	-	95	105	18	45
44-8M-20MMPB	44	20	Cl	6F	112,05	110,67	119,0	75	-	28	38	15	45
44-8M-30MMPB		30	Cl	6F	112,05	110,67	119,0	75	-	38	48	15	45
44-8M-50MMPB		50	Cl	6F	112,05	110,67	119,0	75	-	60	70	18	45
44-8M-85MMPB		85	Cl	6F	112,05	110,67	119,0	75	-	95	105	18	45
48-8M-20MMPB	48	20	Cl	6F	122,23	120,86	127,0	75	-	28	38	15	45
48-8M-30MMPB		30	Cl	6F	122,23	120,86	127,0	75	-	38	48	15	45
48-8M-50MMPB		50	Cl	6F	122,23	120,86	127,0	80	-	60	70	18	45
48-8M-85MMPB		85	Cl	6F	122,23	120,86	127,0	80	-	95	105	18	45
56-8M-20MMPB	56	20	Cl	6WF	142,60	141,23	148,0	80	117	28	38	15	45
56-8M-30MMPB		30	Cl	6WF	142,60	141,23	148,0	90	117	38	48	15	50
56-8M-50MMPB		50	Cl	10WF	142,60	141,23	148,0	90	117	60	60	18	50
56-8M-85MMPB		85	Cl	6F	142,60	141,23	148,0	80	-	95	105	20	50
64-8M-20MMPB	64	20	Cl	6WF	162,97	161,60	168,0	80	137	28	38	15	45
64-8M-30MMPB		30	Cl	6WF	162,97	161,60	168,0	90	137	38	48	15	50
64-8M-50MMPB		50	Cl	10WF	162,97	161,60	168,0	100	137	60	60	18	55
64-8M-85MMPB		85	Cl	10WF	162,97	161,60	168,0	100	137	95	95	20	55
72-8M-20MMPB	72	20	Cl	6WF	183,35	181,97	192,0	80	158	28	38	15	45
72-8M-30MMPB		30	Cl	6WF	183,35	181,97	192,0	95	158	38	48	15	50
72-8M-50MMPB		50	Cl	10WF	183,35	181,97	192,0	100	158	60	60	18	55
72-8M-85MMPB		85	Cl	10WF	183,35	181,97	192,0	110	158	95	95	20	60


Metric Timing Belt Pulleys -- 8M (For Omega and HTD Belts ) Pilot Bore




Reference	Teeth	Belt Width	Mat'l	Style	Dp	De	Df	Dm	Di	F	L	Pilot Bore =d	Max Bore
80-8M-20MMPB	80	20	CI	6A	203,72	202,35	-	90	180	28	38	15	50
80-8M-30MMPB		30	CI	6A	203,72	202,35	-	100	180	38	48	15	55
80-8M-50MMPB		50	CI	10A	203,72	202,35	-	110	180	60	60	18	60
80-8M-85MMPB		85	CI	10A	203,72	202,35	-	110	180	95	95	20	60
90-8M-20MMPB	90	20	CI	6A	229,18	227,81	-	90	204	28	38	15	50
90-8M-30MMPB		30	CI	6A	229,18	227,81	-	100	204	38	48	15	55
90-8M-50MMPB		50	CI	10A	229,18	227,81	-	110	204	60	60	18	60
90-8M-85MMPB		85	CI	10A	229,18	227,81	-	110	204	95	95	20	60
112-8M-20MMPB	112	20	CI	6A	285,21	283,83	-	90	260	28	38	18	50
112-8M-30MMPB		30	CI	6A	285,21	283,83	-	100	260	38	48	18	55
112-8M-50MMPB		50	CI	10A	285,21	283,83	-	110	260	60	60	18	60
112-8M-85MMPB		85	CI	10A	285,21	283,83	-	110	260	95	95	24	60
144-8M-20MMPB	144	20	CI	6A	366,69	365,32	-	90	341	28	38	20	50
144-8M-30MMPB		30	CI	6A	366,69	365,32	-	100	341	38	48	20	55
144-8M-50MMPB		50	CI	10A	366,69	365,32	-	110	341	60	60	20	60
144-8M-85MMPB		85	CI	10A	366,69	365,32	-	120	341	95	95	24	65
168-8M-20MMPB	168	20	CI	6A	427,81	426,44	-	100	402	28	38	20	55
168-8M-30MMPB		30	CI	6A	427,81	426,44	-	100	402	38	48	20	55
168-8M-50MMPB		50	CI	10A	427,81	426,44	-	120	402	60	60	20	65
168-8M-85MMPB		85	CI	10A	427,81	426,44	-	120	402	95	95	24	65
192-8M-20MMPB	192	20	CI	6A	488,92	487,55	-	100	463	28	38	20	55
192-8M-30MMPB		30	CI	6A	488,92	487,55	-	100	463	38	48	20	55
192-8M-50MMPB		50	CI	10A	488,92	487,55	-	130	463	60	60	20	70
192-8M-85MMPB		85	CI	10A	488,92	487,55	-	130	463	95	95	24	70




# Taper Bore Metric Timing Pulleys ( For Omega and HTD belts )




Style 3F

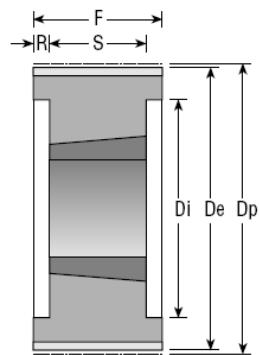


Style 4

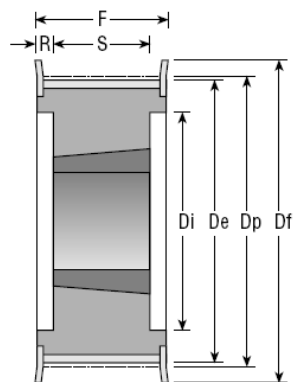


Style 4F

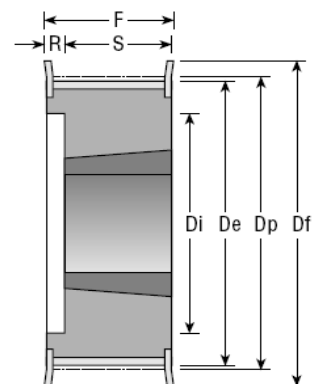


Style 5F

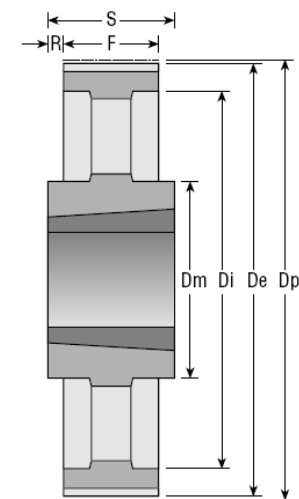


Style 7A

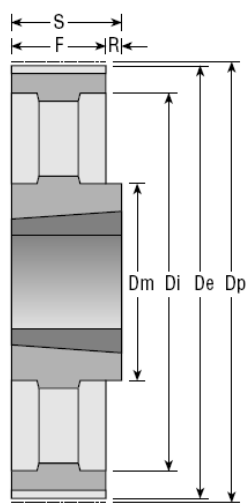


Style 8A

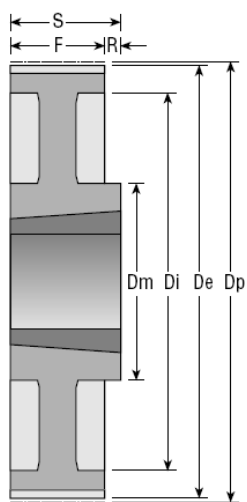


Style 8W

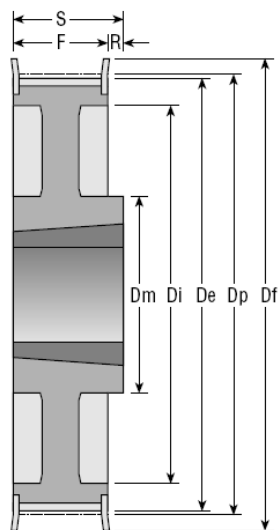


Style 8WF

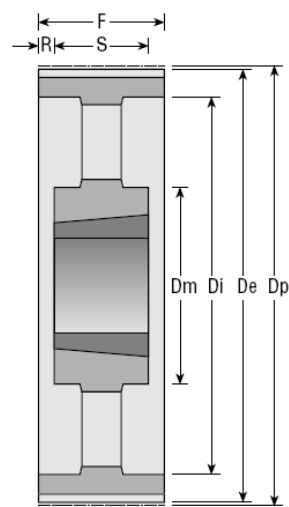

Style 9A

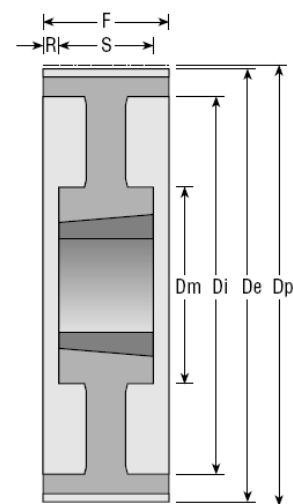

Style 9W

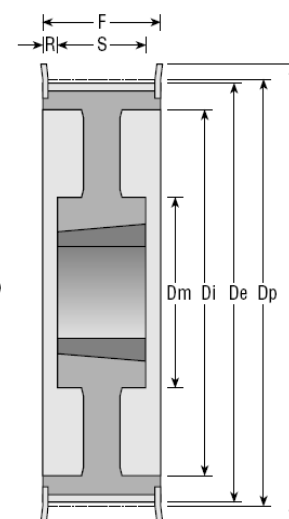

Style 4WF/9WF



**Metric Timing Belt Pulleys -- 5M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
34-5M-15MM	34	15	ST	8F	1008	54,11	52,97	57	43	-	20.5	22	1,5
36-5M-15MM	36	15	ST	8F	1108	57,30	56,16	60	44	-	20.5	22	1,5
38-5M-15MM	38	15	ST	8F	1108	69,48	59,34	66	48	-	20.5	22	1,5
40-5M-15MM	40	15	ST	8F	1108	63,66	62,52	71	52	-	20.5	22	1,5
44-5M-15MM	44	15	ST	8F	1108	70,03	68,89	75	54	-	20.5	22	1,5
48-5M-15MM	48	15	ST	8F	1210	76,39	75,25	83	64	-	20.5	25	4,5
56-5M-15MM	56	15	CI	8F	1210	89,13	87,99	93	70	-	20.5	25	4,5
64-5M-15MM	64	15	CI	8F	1210	101,86	100,72	106	78	-	20.5	25	4,5
72-5M-15MM	72	15	CI	8F	1610	114,59	113,45	119	90	-	20.5	25	4,5
80-5M-15MM	80	15	CI	8F	1610	127,32	126,18	135	92	-	20.5	25	4,5
90-5M-15MM	90	15	CI	7A	1610	143,24	142,10	-	92	126	20.5	25	2,25
112-5M-15MM	112	15	CI	7A	1610	178,25	177,11	-	92	162	20.5	25	2,25
136-5M-15MM	136	15	CI	7A	2012	216,45	215,31	-	106	199	20.5	32	5,75
150-5M-15MM	150	15	CI	7A	2012	238,73	237,59	-	106	222	20.5	32	5,75

**BEARINGS** *All types from the worlds leading manufacturers*

**POWER TRANSMISSION** *Chain Drives, Belt Drives, Conveying Equipment, Gearboxes and Electric Motors*

**SEALING** *Oil Seals, and O Rings in a range of materials*



**OMEGA**



**Metric Timing Belt Pulleys -- 8M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
22-8M-20MM	22	20	CI	5F	1008	56,02	54,65	60,0	-	41	28	22	6
22-8M-30MM		30	CI	5F	1008	56,02	54,65	60,0	-	41	38	22	16
24-8M-20MM	24	20	CI	5F	1108	61,12	59,75	66,0	-	42	28	22	6
24-8M-30MM		30	CI	5F	1108	61,12	59,75	66,0	-	42	38	22	16
26-8M-20MM	26	20	CI	5F	1108	66,21	64,84	71,0	-	46	28	22	6
26-8M-30MM		30	CI	5F	1108	66,21	64,84	71,0	-	46	38	22	16
28-8M-20MM	28	20	CI	5F	1108	71,30	70,08	75,0	-	50	28	22	6
28-8M-30MM		30	ST	5F	1210	71,30	70,08	75,0	-	50	38	25	13
28-8M-50MM		50	ST	5F	1210	71,30	70,08	75,0	-	50	60	25	35
30-8M-20MM	30	20	CI	5F	1108	76,39	75,13	83,0	-	58	28	22	6
30-8M-30MM		30	ST	3F	1615	76,39	75,13	83,0	-	-	38	38	-
30-8M-50MM		50	ST	5F	1615	76,39	75,13	83,0	-	58	60	38	22
32-8M-20MM	32	20	CI	5F	1610	81,49	80,16	87,0	-	62	28	25	3
32-8M-30MM		30	CI	3F	1615	81,49	80,16	87,0	-	-	38	38	-
32-8M-50MM		50	CI	5F	1615	81,49	80,16	87,0	-	62	60	38	22
34-8M-20MM	34	20	CI	5F	1610	86,58	85,22	91,0	-	65	28	25	3
34-8M-30MM		30	CI	3F	1615	86,58	85,22	91,0	-	-	38	38	-
34-8M-50MM		50	CI	5F	1615	86,58	85,22	91,0	-	65	60	38	22
34-8M-85MM		85	CI	4F	1615	86,58	85,22	91,0	-	65	95	38	28,5
36-8M-20MM	36	20	CI	5F	1610	91,67	90,30	98,5	-	68	28	25	3
36-8M-30MM		30	CI	3F	1615	91,67	90,30	98,5	-	-	38	38	-
36-8M-50MM		50	CI	5F	1615	91,67	90,30	98,5	-	68	60	38	22
36-8M-85MM		85	CI	4F	1615	91,67	90,30	98,5	-	68	95	38	28,5
38-8M-20MM	38	20	CI	5F	1610	96,77	95,39	103,0	-	72	28	25	3
38-8M-30MM		30	CI	3F	1615	96,77	95,39	103,0	-	-	38	38	-
38-8M-50MM		50	CI	3F	1615	96,77	95,39	103,0	-	72	60	38	22
38-8M-85MM		85	CI	4F	1615	96,77	95,39	103,0	-	72	95	38	28,5



**Metric Timing Belt Pulleys -- 8M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
40-8M-20MM	40	20	CI	5F	1610	101,86	100,49	106,0	-	76	28	25	3
40-8M-30MM		30	CI	3F	1615	101,86	100,49	106,0	-	-	38	38	-
40-8M-50MM		50	CI	4F	2012	101,86	100,49	106,0	-	82	60	32	14
40-8M-85MM		85	CI	4F	2012	101,86	100,49	106,0	-	82	95	32	31,5
44-8M-20MM	44	20	CI	8F	2012	112,05	110,67	119,0	93	-	28	32	4
44-8M-30MM		30	CI	4F	2012	112,05	110,67	119,0	-	91	38	32	3
44-8M-50MM		50	CI	4F	2012	112,05	110,67	119,0	-	91	60	32	14
44-8M-85MM		85	CI	4F	2012	112,05	110,67	119,0	-	91	95	32	31,5
48-8M-20MM	48	20	CI	8F	2012	122,23	120,86	127,0	96	-	28	32	4
48-8M-30MM		30	CI	4F	2012	122,23	120,86	127,0	-	95	38	32	3
48-8M-50MM		50	CI	4F	2012	122,23	120,86	127,0	-	96	60	32	14
48-8M-85MM		85	CI	4F	2517	122,23	120,86	127,0	-	100	95	45	25
56-8M-20MM	56	20	CI	8F	2012	142,60	141,23	148,0	110	-	28	32	4
56-8M-30MM		30	CI	4F	2012	142,60	141,23	148,0	-	117	38	32	3
56-8M-50MM		50	CI	4F	2517	142,60	141,23	148,0	-	116	60	45	7,5
56-8M-85MM		85	CI	4F	2517	142,60	141,23	148,0	-	117	95	45	25
64-8M-20MM	64	20	CI	8WF	2012	162,97	161,60	168,0	110	137	28	32	4
64-8M-30MM		30	CI	8F	2517	162,97	161,60	168,0	125	-	38	45	7
64-8M-85MM		50	CI	4F	2517	162,97	161,60	168,0	-	137	60	45	7,5
64-8M-85MM		85	CI	4F	2517	162,97	161,60	168,0	-	137	95	45	25
72-8M-20MM	72	20	CI	8WF	2012	183,35	181,97	192,0	110	158	28	32	4
72-8M-30MM		30	CI	8WF	2517	183,35	181,97	192,0	125	158	38	45	7
72-8M-50MM		50	CI	4F	2517	183,35	181,97	192,0	125	158	60	45	7,5
72-8M-85MM		85	CI	4F	3020	183,35	181,97	192,0	-	158	95	51	22
80-8M-20MM	80	20	CI	8W	2012	203,72	202,35	-	110	180	28	32	4
80-8M-30MM		30	CI	8W	2517	203,72	202,35	-	125	180	38	45	7
80-8M-50MM		50	CI	4	3020	203,72	202,35	-	-	180	60	51	-
80-8M-85MM		85	CI	4	3020	203,72	202,35	-	-	180	95	51	-



**Metric Timing Belt Pulleys -- 8M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
90-8M-20MM	90	20	CI	8A	2012	229,18	227,81	-	110	204	28	32	4
90-8M-30MM		30	CI	8A	2517	229,18	227,81	-	125	204	38	45	7
90-8M-50MM		50	CI	9W	3020	229,18	227,81	-	170	204	60	51	4,5
90-8M-85MM		85	CI	9W	3020	229,18	227,81	-	170	204	95	51	22
112-8M-30MM	112	30	CI	8A	2517	285,21	283,83	-	125	260	38	45	7
112-8M-50MM		50	CI	9W	3020	285,21	283,83	-	170	260	60	51	4,5
112-8M-85MM		85	CI	9W	3020	285,21	283,83	-	170	260	95	51	22
144-8M-30MM	144	30	CI	8A	2517	366,69	365,32	-	125	341	38	45	7
144-8M-50MM		50	CI	9A	3020	366,69	365,32	-	170	341	60	51	4,5
144-8M-85MM		85	CI	9A	3525	366,69	365,32	-	190	341	95	65	15
168-8M-50MM	168	50	CI	7A	3525	427,81	426,44	-	190	402	60	65	2,5
168-8M-85MM		85	CI	9A	3525	427,81	426,44	-	190	402	95	65	15
192-8M-50MM	192	50	CI	7A	3525	488,92	487,55	-	190	460	60	65	2,5
192-8M-85MM		85	CI	9A	3525	488,92	487,55	-	190	460	95	65	15



**Metric Timing Belt Pulleys -- 14M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
28-14M-40MM	28	40	CI	4F	2012	124,78	122,12	127	-	98	54	32	11
28-14M-55MM		55	CI	4F	2012	124,78	122,12	127	-	98	70	32	19
28-14M-85MM		85	CI	4F	2517	124,78	122,12	127	-	98	102	45	28,5
28-14M-115MM		115	CI	4F	2517	124,78	122,12	127	-	98	133	45	44
29-14M-40MM	29	40	CI	4F	2012	129,23	126,57	138	-	100	54	32	11
29-14M-55MM		55	CI	4F	2012	129,23	126,57	138	-	100	70	32	19
29-14M-85MM		85	CI	4F	2517	129,23	126,57	138	-	100	102	45	28,5
29-14M-115MM		115	CI	4F	2517	129,23	126,57	138	-	100	133	45	44
30-14M-40MM	30	40	CI	4F	2012	133,69	130,99	138	-	100	54	32	11
30-14M-55MM		55	CI	4F	2517	133,69	130,99	138	-	100	70	45	12,5
30-14M-85MM		85	CI	4F	2517	133,69	130,99	138	-	100	102	45	28,5
30-14M-115MM		115	CI	4F	2517	133,69	130,99	138	-	100	133	45	44
32-14M-40MM	32	40	CI	4F	2012	142,60	139,88	154	-	104	54	32	11
32-14M-55MM		55	CI	4F	2517	142,60	139,88	154	-	108	70	45	12,5
32-14M-85MM		85	CI	4F	2517	142,60	139,88	154	-	108	102	45	28,5
32-14M-115MM		115	CI	4F	2517	142,60	139,88	154	-	108	133	45	44
34-14M-40MM	34	40	CI	4F	2517	151,52	148,79	160	-	110	54	45	4,5
34-14M-55MM		55	CI	4F	2517	151,52	148,79	160	-	110	70	45	12,5
34-14M-85MM		85	CI	4F	2517	151,52	148,79	160	-	110	102	45	28,5
34-14M-115MM		115	CI	4F	2517	151,52	148,79	160	-	110	133	45	44
36-14M-40MM	36	40	CI	4F	2517	160,43	157,68	168	-	120	54	45	4,5
36-14M-55MM		55	CI	4F	2517	160,43	157,68	168	-	120	70	45	12,5
36-14M-85MM		85	CI	4F	3020	160,43	157,68	168	-	125	102	51	25,5
36-14M-115MM		115	CI	4F	3020	160,43	157,68	168	-	125	133	51	41
38-14M-40MM	38	40	CI	4F	2517	169,34	166,60	183	-	130	54	45	4,5
38-14M-55MM		55	CI	4F	2517	169,34	166,60	183	-	130	70	45	12,5
38-14M-85MM		85	CI	4F	3020	169,34	166,60	183	-	130	102	51	25,5
38-14M-115MM		115	CI	4F	3020	169,34	166,60	183	-	130	133	51	41
38-14M-170MM		170	CI	4F	3030	169,34	166,60	183	-	130	187	76	55,5



**Metric Timing Belt Pulleys -- 14M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
40-14M-40MM	40	40	CI	4F	2517	178,25	175,49	188	-	138	54	45	4,5
40-14M-55MM		55	CI	4F	2517	178,25	175,49	188	-	138	70	45	12,5
40-14M-85MM		85	CI	4F	3020	178,25	175,49	188	-	138	102	51	25,5
40-14M-115MM		115	CI	4F	3020	178,25	175,49	188	-	140	133	51	41
40-14M-170MM		170	CI	4F	3030	178,25	175,49	188	-	140	187	76	55,5
44-14M-40MM	44	40	CI	4F	3020	196,08	193,28	211	-	155	54	51	1,5
44-14M-55MM		55	CI	4F	3020	196,08	193,28	211	-	155	70	51	9,5
44-14M-85MM		85	CI	4F	3030	196,08	193,28	211	-	155	102	76	13
44-14M-115MM		115	CI	4F	3030	196,08	193,28	211	-	155	133	76	28,5
44-14M-170MM		170	CI	4F	3535	196,08	193,28	211	-	155	187	89	49
48-14M-40MM	48	40	CI	4F	3020	213,90	211,11	226	-	170	54	51	1,5
48-14M-55MM		55	CI	4F	3020	213,90	211,11	226	-	170	70	51	9,5
48-14M-85MM		85	CI	4F	3030	213,90	211,11	226	-	170	102	76	13
48-14M-115MM		115	CI	4F	3030	213,90	211,11	226	-	170	133	76	28,5
48-14M-170MM		170	CI	4F	3535	213,90	211,11	226	-	175	187	89	49
56-14M-40MM	56	40	CI	9WF	3020	249,55	246,76	256	170	208	54	51	1,5
56-14M-55MM		55	CI	9WF	3020	249,55	246,76	256	170	208	70	51	9,5
56-14M-85MM		85	CI	4F	3525	249,55	246,76	256	190	210	102	65	18,5
56-14M-115MM		115	CI	4F	3535	249,55	246,76	256	-	210	133	89	22
56-14M-170MM		170	CI	4F	3535	249,55	246,76	256	-	210	187	89	49
64-14M-40MM	64	40	CI	9WF	3020	285,21	282,41	296	170	242	54	51	1,5
64-14M-55MM		55	CI	9WF	3020	285,21	282,41	296	170	242	70	51	9,5
64-14M-85MM		85	CI	9WF	3525	285,21	282,41	296	190	242	102	65	18,5
64-14M-115MM		115	CI	9WF	3535	285,21	282,41	296	190	242	133	89	22
64-14M-170MM		170	CI	4F	4040	285,21	282,41	296	-	240	187	102	42,5



**Metric Timing Belt Pulleys -- 14M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
72-14M-40MM	72	40	CI	9W	3020	320,86	318,06	-	170	280	54	51	1,5
72-14M-55MM		55	CI	9W	3020	320,86	318,06	-	170	280	70	51	9,5
72-14M-85MM		85	CI	9W	3525	320,86	318,06	-	190	280	102	65	18,5
72-14M-115MM		115	CI	9W	3535	320,86	318,06	-	190	280	133	89	22
72-14M-170MM		170	CI	9W	4040	320,86	318,06	-	230	280	187	102	42,5
80-14M-40MM	80	40	CI	9A	3020	356,51	353,71	-	170	315	54	51	1,5
80-14M-55MM		55	CI	9A	3020	356,51	353,71	-	170	315	70	51	9,5
80-14M-85MM		85	CI	9A	3525	356,51	353,71	-	190	315	102	65	18,5
80-14M-115MM		115	CI	9A	3535	356,51	353,71	-	190	315	133	89	22
80-14M-170MM		170	CI	9W	4040	356,51	353,71	-	230	315	187	102	42,5
90-14M-40MM	90	40	CI	9A	3020	401,07	398,28	-	170	360	54	51	1,5
90-14M-55MM		55	CI	9A	3020	401,07	398,28	-	170	360	70	51	9,5
90-14M-85MM		85	CI	9A	3525	401,07	398,28	-	190	360	102	65	18,5
90-14M-115MM		115	CI	9A	3535	401,07	398,28	-	190	360	133	89	22
90-14M-170MM		170	CI	9A	4040	401,07	398,28	-	230	360	187	102	42,5
112-14M-40MM	112	40	CI	9A	3020	499,11	496,32	-	170	457	54	51	1,5
112-14M-55MM		55	CI	9A	3020	499,11	496,32	-	170	457	70	51	9,5
112-14M-85MM		85	CI	9A	3525	499,11	496,32	-	190	457	102	65	18,5
112-14M-115MM		115	CI	9A	3535	499,11	496,32	-	190	457	133	89	22
112-14M-170MM		170	CI	9A	5050	499,11	496,32	-	265	456	187	127	3
144-14M-40MM	144	40	CI	9A	3020	641,71	638,92	-	170	600	54	51	1,5
144-14M-55MM		55	CI	9A	3020	641,71	638,92	-	170	600	70	51	9,5
144-14M-85MM		85	CI	9A	3525	641,71	638,92	-	190	600	102	65	18,5
144-14M-115MM		115	CI	9A	4040	641,71	638,92	-	230	600	133	102	15,5
144-14M-170MM		170	CI	9A	5050	641,71	638,92	-	265	600	187	127	3







**Metric Timing Belt Pulleys -- 14M (For Omega and HTD Belts ) Taper Bore**

Reference	Teeth	Belt Width	Mat'l	Style	Bush	Dp	De	Df	Dm	Di	F	S	R
168-14M-40MM	168	40	CI	9A	3020	748,66	745,87	-	170	706	54	51	1,5
168-14M-55MM		55	CI	9A	3020	748,66	745,87	-	170	706	70	51	9,5
168-14M-85MM		85	CI	9A	3525	748,66	745,87	-	190	706	102	65	18,5
168-14M-115MM		115	CI	9A	4040	748,66	745,87	-	230	706	133	102	15,5
168-14M-170MM		170	CI	9A	5050	748,66	745,87	-	265	706	187	127	3
192-14M-40MM	192	40	CI	9A	3020	855,62	852,82	-	170	813	54	51	1,5
192-14M-55MM		55	CI	9A	3020	855,62	852,82	-	170	813	70	51	9,5
192-14M-85MM		85	CI	3A	4040	855,62	852,82	-	230	813	102	102	-
192-14M-115MM		115	CI	9A	4040	855,62	852,82	-	230	813	133	102	15,5
192-14M-170MM		170	CI	9A	5050	855,62	852,82	-	265	813	187	127	3
216-14M-40MM	216	40	CI	9A	3020	962,57	959,76	-	170	920	54	51	1,5
216-14M-55MM		55	CI	7A	3535	962,57	959,76	-	190	920	70	89	9,5
216-14M-85MM		85	CI	3A	4040	962,57	959,76	-	230	920	102	102	-
216-14M-115MM		115	CI	9A	4040	962,57	959,76	-	230	920	133	102	15,5
216-14M-170MM		170	CI	9A	5050	962,57	959,76	-	265	920	187	127	3
238-14M-40MM	238	40	CI	9A	3020	1060,61	1057,81	-	170	1017	54	51	1,5
238-14M-55MM		55	CI	7A	3535	1060,61	1057,81	-	190	1017	70	89	9,5
238-14M-85MM		85	CI	3A	4040	1060,61	1057,81	-	230	1017	102	102	-
238-14M-115MM		115	CI	9A	4040	1060,61	1057,81	-	230	1017	133	102	15,5
238-14M-170MM		170	CI	9A	5050	1060,61	1057,81	-	265	1017	187	127	3
244-14M-40MM	244	40	CI	9A	3020	1087,35	1084,56	-	170	1044	54	51	1,5
244-14M-55MM		55	CI	7A	3535	1087,35	1084,56	-	190	1044	70	89	9,5
244-14M-85MM		85	CI	3A	4040	1087,35	1084,56	-	230	1044	102	102	-
244-14M-115MM		115	CI	9A	4040	1087,35	1084,56	-	230	1044	133	102	15,5
244-14M-170MM		170	CI	9A	5050	1087,35	1084,56	-	265	1044	187	127	3
264-14M-40MM	264	40	CI	9A	3020	1176,47	1173,68	-	170	1133	54	51	1,5
264-14M-55MM		55	CI	7A	3535	1176,47	1173,68	-	190	1133	70	89	9,5
264-14M-85MM		85	CI	3A	4040	1176,47	1173,68	-	230	1133	102	102	-
264-14M-115MM		115	CI	9A	4040	1176,47	1173,68	-	230	1133	133	102	15,5
264-14M-170MM		170	CI	9A	5050	1176,47	1173,68	-	265	1133	187	127	3


# Taper & Pilot Bore Metric Timing Pulleys ( For Poly Chain® GT ) Belts

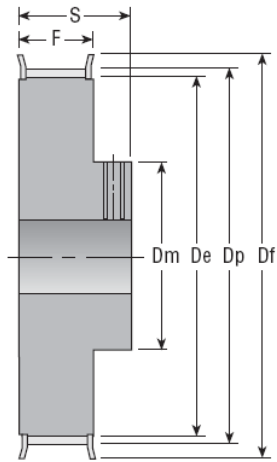


Style PB

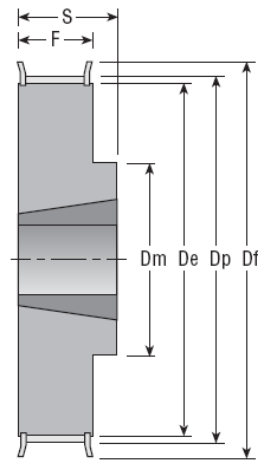


Style 2F

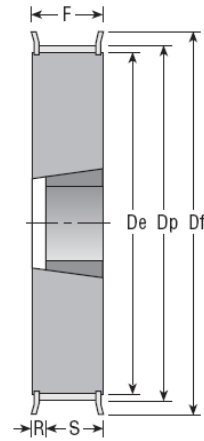


Style 3F

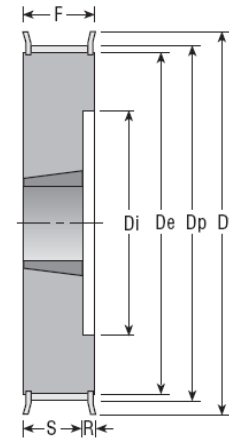


Style 5F

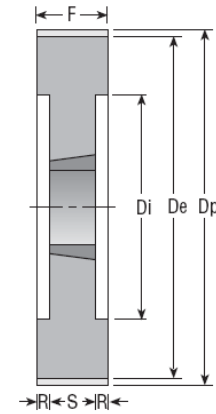


Style 6

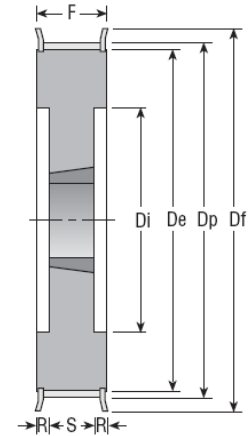


Style 6F

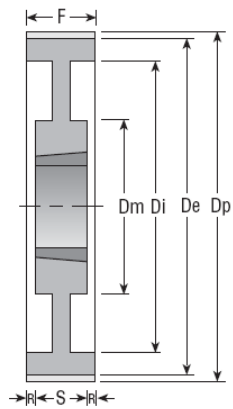


Style 7

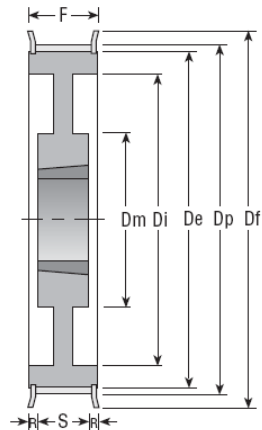


Style 7F

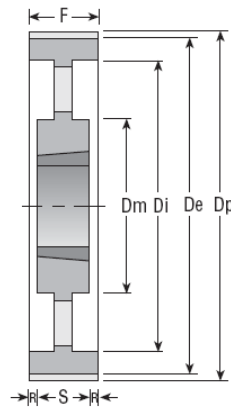


Style 8

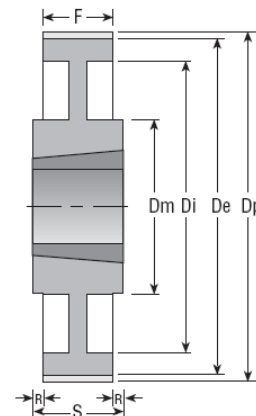

Style 9

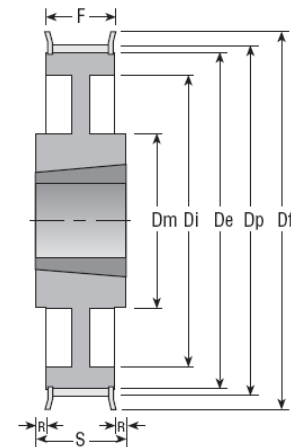

Style 9F

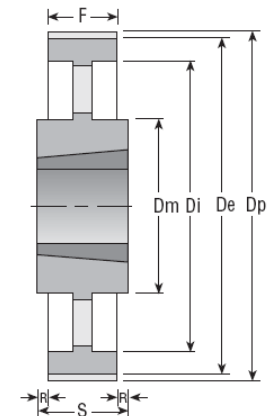

Style 10



Metric Timing Belt Pulleys -- **8M** ( For Poly Chain® GT2 Belts )

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-22S-12PB	22	12	ST	PB	12	28	56,02	54,42	62	43	-	20	30	-
8M-22S-21PB		21	ST	PB	12	28*	56,02	54,42	62	43	-	30	40	-
8M-25S-12	25	12	CI	2F	1108	28	63,66	62,06	70	49	-	20	22	-
8M-25S-21		21	CI	3F	1108	28	63,66	62,06	70	-	-	30	22	8
8M-25S-36PB		36	ST	PB	12	32	63,66	62,06	70	49	-	45	55	-
8M-28S-12	28	12	CI	2F	1108	28	71,30	69,70	79	59	-	20	22	
8M-28S-21		21	ST	3F	1210	32	71,30	69,70	79	-	-	30	25	5
8M-28S-36		36	ST	3F	1210	32	71,30	69,70	79	-	-	45	25	20
8M-30S-12	30	12	CI	2F	1210	32	76,39	74,79	86	66	-	20	25	-
8M-30S-21		21	ST	3F	1210	32	76,39	74,79	86	-	-	30	25	5
8M-30S-36		36	ST	3F	1610	42	76,39	74,79	86	-	-	45	25	20
8M-30S-62PB		62	ST	PB	20	42	76,39	74,79	86	65	-	72	84	-
8M-32S-12	32	12	CI	2F	1610	42	81,49	79,89	90	66	-	20	25	-
8M-32S-21		21	ST	3F	1610	42	81,49	79,89	90	-	-	30	25	5
8M-32S-36		36	ST	3F	1610	42	81,89	79,89	90	-	-	45	25	20
8M-32S-62PB		62	ST	PB	20	50*	81,49	79,89	90	69	-	72	84	-
8M-34S-12	34	12	CI	2F	1610	42	86,58	84,98	95	70	-	20	25	-
8M-34S-21		21	CI	3F	1610	42	86,58	84,98	95	-	-	30	25	5
8M-34S-36		36	CI	3F	1610	42	86,58	84,98	95	-	-	45	25	20
8M-34S-62PB		62	ST	PB	20	55*	86,58	84,98	95	74	-	72	84	-
8M-36S-12	36	12	CI	2F	1610	42	91,67	90,07	98	78	-	20	25	-
8M-36S-21		21	CI	3F	1610	42	91,67	90,07	98	-	-	30	25	5
8M-36S-36		36	CI	3F	1610	42	91,67	90,07	98	-	-	45	25	20
8M-36S-62PB		62	ST	PB	20	60*	91,67	90,07	98	77	-	72	84	-
8M-38S-12	38	12	CI	2F	1610	42	96,77	95,17	106	80	-	20	25	-
8M-38S-21		21	CI	3F	1610	42	96,77	95,17	106	-	-	30	25	5
8M-38S-36		36	CI	3F	1610	42	96,77	95,17	106	-	-	45	25	20
8M-38S-62PB		62	ST	PB	20	60	96,77	95,17	106	84	-	72	84	-

\* Maximum bore to be fitted with a shallow key



Metric Timing Belt Pulleys -- **8M** ( For Poly Chain® GT2 Belts )

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
8M-40S-12	40	12	CI	2F	1610	42	101,86	100,26	111	85	-	20	25	-
8M-40S-21		21	CI	3F	1610	42	101,86	100,26	111	-	-	30	25	5
8M-40S-36		36	ST	3F	2012	50	101,86	100,26	111	-	-	45	32	13
8M-40S-62		62	CI	3F	2012	50	101,86	100,26	111	-	-	72	32	40
8M-45S-12	45	12	CI	2F	2012	50	114,59	112,99	119	92	-	20	32	-
8M-45S-21		21	CI	2F	2012	50	114,59	112,99	119	92	-	30	32	-
8M-45S-36		36	CI	3F	2012	50	114,59	112,99	119	-	-	45	32	13
8M-45S-62		62	CI	3F	2012	50	114,59	112,99	119	-	-	72	32	40
8M-48S-12	48	12	CI	2F	2012	50	122,23	120,63	135	104	-	20	32	-
8M-48S-21		21	CI	2F	2012	50	122,23	120,63	135	104	-	30	32	-
8M-48S-36		36	CI	3F	2012	50	122,23	120,63	135	-	-	45	32	13
8M-48S-62		62	CI	3F	2517	60	122,23	120,63	135	-	-	72	45	27
8M-50S-12	50	12	CI	2F	2012	50	127,32	125,72	135	104	-	20	32	-
8M-50S-21		21	CI	2F	2012	50	127,32	125,72	135	104	-	30	32	-
8M-50S-36		36	CI	3F	2012	50	127,32	125,72	135	-	-	45	32	13
8M-50S-62		62	CI	3F	2517	60	127,32	125,72	135	-	-	72	45	27
8M-56S-12	56	12	CI	2F	2012	50	142,60	141,00	151	104	-	20	32	-
8M-56S-12		21	CI	2F	2012	50	142,60	141,00	151	111	-	30	32	-
8M-56S-36		36	CI	3F	2517	60	142,60	141,00	151	-	-	45	45	0
8M-56S-62		62	CI	6F	2517	60	142,60	141,00	151	-	111	72	45	13,5
8M-60S-12	60	12	CI	2F	2012	50	152,79	151,19	159	111	-	20	32	-
8M-60S-21		21	CI	2F	2517	60	152,79	151,19	159	124	-	30	45	-
8M-60S-36		36	CI	3F	2517	60	152,79	151,19	159	-	-	45	45	0
8M-60S-62		62	CI	6F	2517	60	152,79	151,19	159	-	121	72	45	13,5



Metric Timing Belt Pulleys -- 14M ( For Poly Chain® GT2 Belts )

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-28S-20	28	20	CI	3F	2012	50	124,78	121,98	141	-	-	33	32	1
14M-28S-37		37	CI	5F	2012	50	124,78	121,98	141	-	88	51	32	19
14M-30S-20	30	20	CI	3F	2012	50	133,69	130,89	141	-	-	33	32	1
14M-30S-27		37	CI	6F	2517	60	133,69	130,89	141	-	98	51	45	3
14M-32S-20	32	20	CI	3F	2012	50	142,60	139,80	155	-	-	33	32	1
14M-32S-37		27	CI	6F	2517	60	142,60	139,80	155	-	100	51	45	3
14M-34S-20	34	20	CI	2F	2517	60	151,52	148,72	162	117	-	33	45	-
14M-34S-37		37	CI	6F	2517	60	151,52	148,72	162	-	109	51	45	3
14M-34S-68PB		68	CI	PB	40	100	151,52	148,72	162	134	-	84	104	-
14M-36S-20	36	20	CI	2F	2517	60	160,43	157,53	168	117	-	33	45	-
14M-36S-37		37	CI	5F	2517	60	160,43	157,53	168	-	117	51	45	6
14M-36S-68PB		68	CI	PB	40	110*	160,43	157,53	168	134	-	84	104	-
14M-36S-90PB		90	CI	PB	50	110	160,43	157,53	168	131	-	106	136	-
14M-38S-20	38	20	CI	2F	2517	60	169,34	166,54	183	117	-	33	45	-
14M-38S-37		37	CI	5F	2517	60	169,34	166,54	183	-	126	51	45	6
14M-38S-68PB		68	CI	PB	40	115*	169,34	166,54	183	141	-	84	104	-
14M-38S-90PB		90	CI	PB	50	115	169,34	166,54	183	147	-	106	136	-
14M-38S-125PB		125	CI	PB	50	115	169,34	166,54	183	147	-	141	161	-
14M-40S-20	40	20	CI	2F	2517	60	178,25	175,45	197	117	-	33	45	-
14M-40S-37		37	CI	5F	2517	60	178,25	175,45	197	-	135	51	45	6
14M-40S-68PB		68	CI	PB	40	125*	178,25	175,45	197	156	-	84	104	-
14M-40S-90PB		90	CI	PB	50	125	178,25	175,45	197	156	-	106	136	-
14M-40S-125PB		125	CI	PB	50	125	178,25	175,45	197	156	-	141	161	-
14M-44S-20	44	20	CI	2F	3020	75	196,08	193,28	211	144	-	33	51	-
14M-44S-37		37	CI	3F	3020	75	196,08	193,28	211	-	-	51	51	-
14M-44S-68		68	CI	6F	3020	75	196,08	193,28	211	-	153	84	51	16,5
14M-44S-90PB		90	CI	PB	50	140	196,08	193,28	211	169	-	106	136	-
14M-44S-125PB		125	CI	PB	50	140	196,08	193,28	211	170	-	141	161	-

\* Maximum bore to be fitted with a shallow key

Metric Timing Belt Pulleys -- 14M ( For Poly Chain® GT2 Belts )



Reference	Teeth	Belt Width	Mat'l	Style	Bush/PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-48S-20	48	20	CI	2F	3020	75	213,90	211,11	226	144	-	33	51	-
14M-48S-37		37	CI	3F	3020	75	213,90	211,11	226	-	-	51	51	-
14M-48S-68		68	CI	5F	3020	75	213,90	211,11	226	-	171	84	51	33
14M-48S-90		90	CI	6F	3525	100	213,90	211,11	226	-	171	106	66	20
14M-48S-125PB		125	CI	PB	50	160	213,90	211,11	226	185	-	141	161	-
14M-50S-20	50	20	CI	2F	3020	75	222,82	220,02	239	144	-	33	51	-
14M-50S-37		37	CI	3F	3020	75	222,82	220,02	239	-	-	51	51	-
14M-50S-68		68	CI	6F	3525	100	222,82	220,02	239	-	180	84	65	9,5
14M-50S-68		90	CI	6F	3525	100	222,82	220,02	239	-	180	106	66	20
14M-50S-125		125	CI	6F	3525	100	222,82	220,02	239	-	180	141	65	38
14M-56S-20	56	20	CI	9F	3020	75	249,55	246,76	267	144	207	33	51	9
14M-56S-37		37	CI	7F	3020	75	249,55	246,76	267	144	207	51	51	0
14M-56S-68		68	CI	6F	3525	100	249,55	246,76	267	-	207	84	65	9,5
14M-56S-90		90	CI	6F	3525	100	249,55	246,76	267	-	207	106	66	20
14M-56S-125		125	CI	6F	3525	100	249,55	246,76	267	-	207	141	65	38
14M-60S-20	60	20	CI	9	3020	75	267,38	264,58	-	159	224	33	51	9
14M-60S-37		37	CI	7	3020	75	267,38	264,58	-	159	224	51	51	-
14M-60S-68		68	CI	6	3525	100	267,38	264,58	-	-	224	84	65	9,5
14M-60S-90		90	CI	6	3525	100	267,38	264,58	-	-	224	106	66	20
14M-60S-125		125	CI	6	4030	115	267,38	264,58	-	-	224	141	76	32,5
14M-64S-20	64	20	CI	9	3020	75	285,21	282,41	-	159	242	33	51	9
14M-64S-37		37	CI	7	3020	75	285,21	282,41	-	159	242	51	51	-
14M-64S-68		68	CI	6	3525	100	285,21	282,41	-	-	242	84	65	9,5
14M-64S-90		90	CI	6	3525	100	285,21	282,41	-	-	242	106	66	20
14M-64S-125		125	CI	6	4030	115	285,21	282,41	-	-	242	141	76	32,5
14M-72S-20	72	20	CI	9	3020	75	320,86	318,06	-	159	278	33	51	9
14M-72S-37		37	CI	7	3020	75	320,86	318,06	-	159	278	51	51	-
14M-72S-68		68	CI	7	3525	100	320,86	318,06	-	178	278	84	65	9,5
14M-72S-90		90	CI	7	3525	100	320,86	318,06	-	178	278	106	66	20
14M-72S-125		125	CI	7	4030	115	320,86	318,06	-	215	278	141	76	32,5



**Metric Timing Belt Pulleys -- 14M ( For Poly Chain® GT2 Belts )**

Reference	Teeth	Belt Width	Mat'l	Style	Bush/ PB	Max Bore	DP	DE	DF	DM	DI	F	S	R
14M-80S-20	80	20	CI	9	3020	75	356,51	353,71	-	159	314	33	51	9
14M-80S-37		37	CI	7	3020	75	356,51	353,71	-	159	314	51	51	-
14M-80S-68		68	CI	7	3525	100	356,51	353,71	-	178	314	84	65	9,5
14M-80S-90		90	CI	7	4030	115	356,51	353,71	-	215	314	106	76	15
14M-80S-125		125	CI	7	4030	115	356,51	353,71	-	215	314	141	76	32,5
14M-90S-20	90	20	CI	10	3020	75	401,07	398,27	-	159	360	33	51	9
14M-90S-37		37	CI	8	3020	75	401,07	398,27	-	159	360	51	51	0
14M-90S-68		68	CI	8	3525	100	401,07	398,27	-	178	360	84	65	9,5
14M-90S-90		90	CI	7	4030	115	401,07	398,27	-	215	360	106	76	15
14M-90S-125		125	CI	7	4030	115	401,07	398,27	-	215	360	141	76	32,5
14M-112S-20	112	20	CI	10	3020	75	499,11	496,31	-	159	456	33	51	9
14M-112S-37		37	CI	8	3020	75	499,11	496,31	-	159	456	51	51	0
14M-112S-68		68	CI	8	3525	100	499,11	496,31	-	178	456	84	65	9,5
14M-112S-90		90	CI	8	4535	125	499,11	496,31	-	215	456	106	90	8
14M-112S-125		125	CI	8	4535	125	499,11	496,31	-	215	581	141	89	26
14M-140S-20	140	20	CI	10	3020	75	623,89	621,09	-	159	581	33	51	9
14M-140S-37		37	CI	10	3525	100	623,89	621,09	-	206	581	51	65	7
14M-140S-68		68	CI	8	3525	100	623,89	621,09	-	206	581	84	65	9,5
14M-140S-90		90	CI	8	4535	125	623,89	621,09	-	215	581	106	90	8
14M-140S-125		125	CI	8	4535	125	623,89	621,09	-	215	581	141	89	26
14M-168S-37	168	37	CI	10	3525	100	748,66	745,87	-	206	706	51	65	7
14M-168S-68		68	CI	8	3525	100	748,66	745,87	-	206	706	84	65	9,5
14M-168S-90		90	CI	8	5040	130*	748,66	745,87	-	267	708	106	102	2
14M-168S-125		125	CI	8	5040	125	748,66	745,87	-	267	706	141	102	19,5
14M-192S-37	192	37	CI	10	4030	115	855,61	852,82	-	215	812	51	76	12,5
14M-192S-68		68	CI	8	4030	115	855,61	852,82	-	215	812	84	76	4
14M-192S-90		90	CI	8	5040	130*	855,61	852,82	-	267	812	106	102	2
14M-192S-125		125	CI	8	5040	125	855,61	852,82	-	267	812	141	102	19,5