




Housed Bearing Inserts




1000G



1000DECG



1200G




1200ECG

To suit Casting Designation

Standard	DEC Type	A Type	EC Type
----------	----------	--------	---------


Standard Self-Lube® insert references

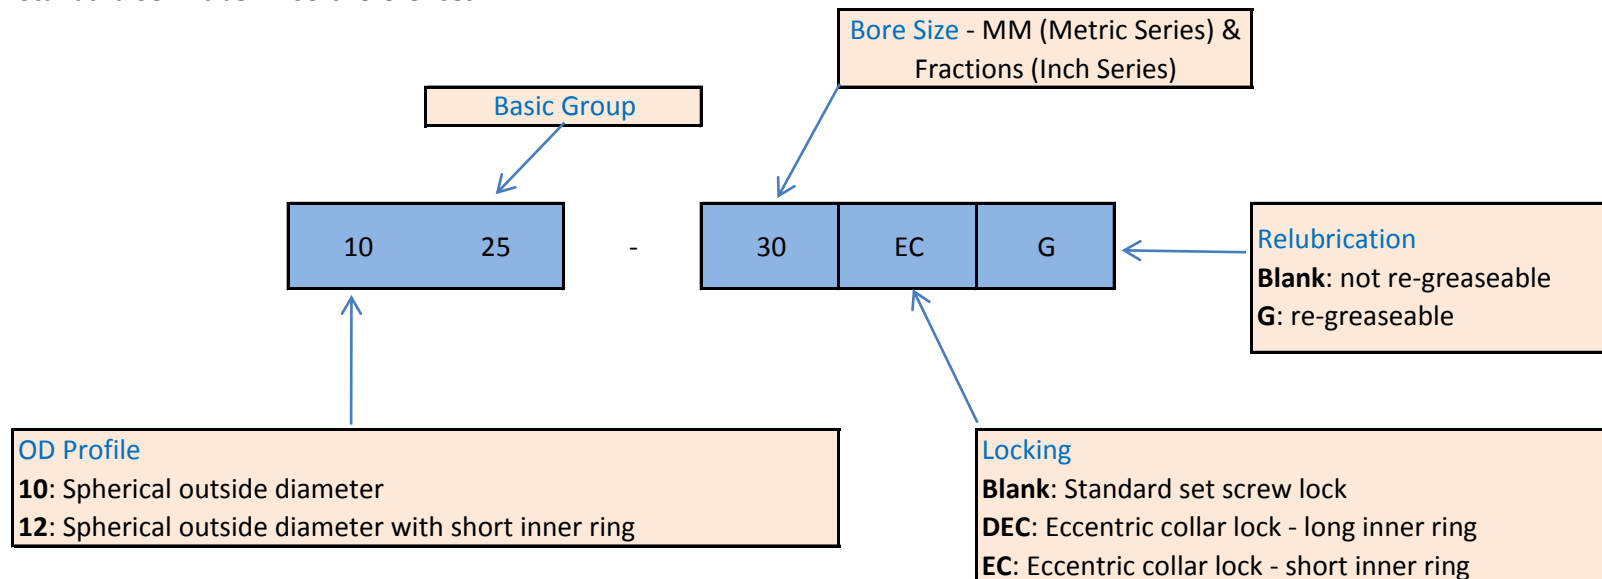

Self-Lube[®] bearing inserts 1000G



Shaft Diameter (mm)		RHP designation	Dimensions(mm)						
Metric Range	Imperial Range		D	C	B	S	d1	M	r
12	12.7	1017-12G	40	12	27.38	11.58	24.8	5	0.6
		1017-1/2G	40	12	27.38	11.58	24.8	5	0.6
	15.875	1017-15G	40	12	27.38	11.58	24.8	5	0.6
		1017-5/8G	40	12	27.38	11.58	24.8	5	0.6
		1017-16G	40	12	27.38	11.58	24.8	5	0.6
17		1017-17G	40	12	27.38	11.58	24.8	5	0.6
20	19.05	1020-3/4G	47	14	31	12.73	28.3	5	1
		1020-20G	47	14	31	12.73	28.3	5	1
25	22.225	1025-7/8G	52	15	34.1	14.33	34	5	1
	23.812	1025-15/16G	52	15	34.1	14.33	34	5	1
		1025-25G	52	15	34.1	14.33	34	5	1
	25.4	1025-1G	52	15	34.1	14.33	34	5	1
25	25.4	1030-25G	62	16	38.1	15.93	40.3	5	1
	28.575	1030-1G	62	16	38.1	15.93	40.3	5	1
		1030-1-1/8G	62	16	38.1	15.93	40.3	5	1
30	30.16	1030-30G	62	16	38.1	15.93	40.3	5	1
	31.75	1030-1-3/16G	62	16	38.1	15.93	40.3	5	1
		1030-1-1/4G	62	16	38.1	15.93	40.3	5	1
30	30.16	1035-30G	72	17	42.9	17.53	46.9	6.5	1
	31.75	1035-1-3/16G	72	17	42.9	17.53	46.9	6.5	1
	33.337	1035-1-1/4G	72	17	42.9	17.53	46.9	6.5	1
	34.925	1035-1-5/16G	72	17	42.9	17.53	46.9	6.5	1
		1035-1-3/8G	72	17	42.9	17.53	46.9	6.5	1
		1035-35G	72	17	42.9	17.53	46.9	6.5	1
	36.512	1035-1-7/16G	72	17	42.9	17.53	46.9	6.5	1
35	34.925	1040-1-3/8G	80	18	49.2	19.03	52.4	8	1
		1040-35G	80	18	49.2	19.03	52.4	8	1
	36.512	1040-1-7/16G	80	18	49.2	19.03	52.4	8	1
	38.1	1040-1-1/2G	80	18	49.2	19.03	52.4	8	1
40		1040-40G	80	18	49.2	19.03	52.4	8	1
40	38.1	1045-1-1/2G	85	19	49.2	19.04	57.4	8	1
		1045-40G	85	19	49.2	19.04	57.4	8	1
	41.275	1045-1-5/8G	85	19	49.2	19.04	57.4	8	1
	42.862	1045-1-11/16G	85	19	49.2	19.04	57.4	8	1

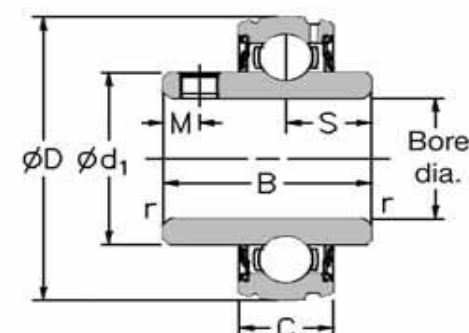


1000G With spherical outside diameter and
integral set screw lock

With 2 setscrews 120° apart

Self-Lube[®] bearing inserts 1000G



Shaft Diameter (mm)		RHP designation	Dimensions(mm)						
Metric Range	Imperial Range		D	C	B	S	d1	M	r
45	44.45	1045-1-3/4G	85	19	49.2	19.04	57.4	8	1
		1045-45G	85	19	49.2	19.04	57.4	8	1
45	42.862	1050-1-11/16G	90	20	51.6	19.04	62.4	10	1
	44.45	1050-1-3/4G	90	20	51.6	19.04	62.4	10	1
	47.625	1050-45G	90	20	51.6	19.04	62.4	10	1
	49.212	1050-1-7/8G	90	20	51.6	19.04	62.4	10	1
50	49.212	1050-1-15/16G	90	20	51.6	19.04	62.4	10	1
	50.8	1050-50G	90	20	51.6	19.04	62.4	10	1
	50.8	1050-2G	90	20	51.6	19.04	62.4	10	1
50	47.625	1055-1-7/8G	100	21	55.6	22.24	68.9	10	1.5
	49.212	1055-1-15/16G	100	21	55.6	22.24	68.9	10	1.5
		1055-50G	100	21	55.6	22.24	68.9	10	1.5
	50.8	1055-2G	100	21	55.6	22.24	68.9	10	1.5
	53.975	1055-2-1/8G	100	21	55.6	22.24	68.9	10	1.5
55		1055-55G	100	21	55.6	22.24	68.9	10	1.5
	55.562	1055-2-3/16G	100	21	55.6	22.24	68.9	10	1.5
55		1060-55G	110	22	65.1	25.44	76	10	1.5
	55.562	1060-2-3/16G	110	22	65.1	25.44	76	10	1.5
	57.15	1060-2-1/4G	110	22	65.1	25.44	76	10	1.5
		1060-60G	110	22	65.1	25.44	76	10	1.5
	60.325	1060-2-3/8G	110	22	65.1	25.44	76	10	1.5
	61.912	1060-2-7/16G	110	22	65.1	25.44	76	10	1.5
60		1065-60G	120	23	65.1	25.44	82.5	10	1.5
	63.5	1065-2-1/2G	120	23	65.1	25.44	82.5	10	1.5
65		1065-65G	120	23	65.1	25.44	82.5	10	1.5
60		1070-60G	125	24	74.6	30.24	89	12	1.5
	61.912	1070-2-7/16G	125	24	74.6	30.24	89	12	1.5
	63.5	1070-2-1/2G	125	24	74.6	30.24	89	12	1.5
		1070-65G	125	24	74.6	30.24	89	12	1.5
	66.675	1070-2-5/8G	125	24	74.6	30.24	89	12	1.5
	68.262	1070-2-11/16G	125	24	74.6	30.24	89	12	1.5
70		1070-70G	125	24	74.6	30.24	89	12	1.5
65		1075-65G	130	25	77.8	33.34	94	12	1.5
	68.262	1075-2-11/16G	130	25	77.8	33.34	94	12	1.5

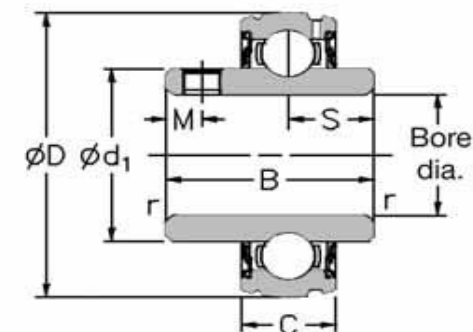


1000G With spherical outside diameter and
integral set screw lock
With 2 setscrews 120° apart

Self-Lube[®] bearing inserts 1000G



Shaft Diameter (mm)		RHP designation	Dimensions(mm)						
Metric Range	Imperial Range		D	C	B	S	d1	M	r
70	69.85	1075-2-3/4G	130	25	77.8	33.34	94	12	1.5
		1075-70G	130	25	77.8	33.34	94	12	1.5
	73.025	1075-2-7/8G	130	25	77.8	33.34	94	12	1.5
75	74.612	1075-2-15/16G	130	25	77.8	33.34	94	12	1.5
		1075-75G	130	25	77.8	33.34	94	12	1.5
	76.2	1075-3G	130	25	77.8	33.34	94	12	1.5
75	74.612	1080-2-15/16G	140	26	82.6	33.34	100	12	2
		1080-75G	140	26	82.6	33.34	100	12	2
	76.2	1080-3G	140	26	82.6	33.34	100	12	2
80		1080-80G	140	26	82.6	33.34	100	12	2
	80.962	1080-3-3/16G	140	26	82.6	33.34	100	12	2
	82.55	1080-3-1/4G	140	26	82.6	33.34	100	12	2
80		1085-80G	150	28	85.7	34.15	107.1	12	2
	80.962	1085-3-3/16G	150	28	85.7	34.15	107.1	12	2
	82.55	1085-3-1/4G	150	28	85.7	34.15	107.1	12	2
85		1085-85G	150	28	85.7	34.15	107.1	12	2
	85.725	1085-3-3/8G	150	28	85.7	34.15	107.1	12	2
	87.312	1085-3-7/16G	150	28	85.7	34.15	107.1	12	2
85		1090-85G	160	30	96	39.74	111.5	15	2
	87.312	1090-3-7/16G	160	30	96	39.74	111.5	15	2
	88.9	1090-3-1/2G	160	30	96	39.74	111.5	15	2
90		1090-90G	160	30	96	39.74	111.5	15	2
95		3095-95G	200	45	117.48	49.31	127.1	16	2.5
		3095-100G	200	45	117.48	49.31	127.1	16	2.5
100	100.012	3095-3-15/16G	200	45	117.48	49.31	127.1	16	2.5
	101.6	3095-4G	200	45	117.48	49.31	127.1	16	2.5

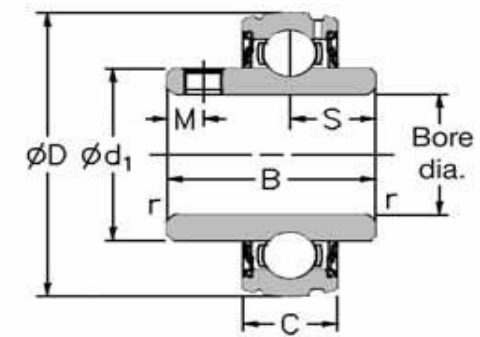


1000G With spherical outside diameter and
integral set screw lock
With 2 setscrews 120° apart

Self-Lube[®] bearing inserts 1200G



Shaft Diameter (mm)		RHP designation	Dimensions(mm)						
Metric Range	Imperial Range		D	C	B1	S1	d1	M	r
20	19.05	1220-3/4G	47	14	25.8	7.53	28.3	5	1
		1220-20G	47	14	25.8	7.53	28.3	5	1
25	25.4	1225-25G	52	15	27.3	7.53	34	5	1
		1225-1G	52	15	27.3	7.53	34	5	1
30	31.75	1230-30G	62	16	31.2	9.03	40.3	5	1
		1230-1/4G	62	16	31.2	9.03	40.3	5	1
35	31.75	1235-1-1/4G	72	17	34.9	9.53	46.9	6.5	1
		1235-35G	72	17	34.9	9.53	46.9	6.5	1
40	38.1	1240-1-1/2G	80	18	41.2	11.03	52.4	8	1
		1240-40G	80	18	41.2	11.03	52.4	8	1
45	44.45	1245-1-3/4G	85	19	41.2	11.04	57.4	8	1
		1245-45G	85	19	41.2	11.04	57.4	8	1
50		1250-50G	90	20	43.5	11.04	62.4	10	1

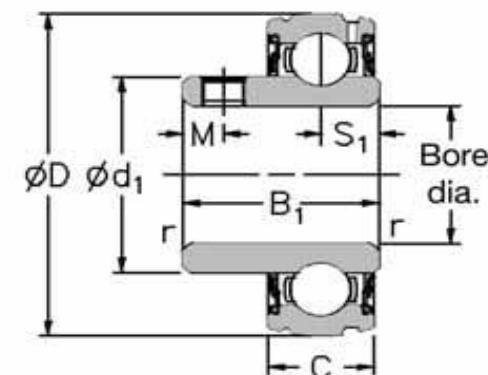


1200G With spherical outside diameter and integral set screw lock

With 2 setscrews 120° apart

Self-Lube[®] bearing inserts 1000DECG



Shaft Diameter (mm)		RHP designation	Dimensions(mm)					
Metric Range	Imperial Range		D	C	B3	S2	d2	r
20	19.05	1020-3/4DECG	47	14	43.73	17.13	33.3	1
		1020-20DECG	47	14	43.73	17.13	33.3	1
25	22.225	1025-7/8DECG	52	15	44.43	17.53	38.1	1
	23.812	1025-15/16DECG	52	15	44.43	17.53	38.1	1
		1025-25DECG	52	15	44.43	17.53	38.1	1
		1025-1DECG	52	15	44.43	17.53	38.1	1
30	28.575	1030-1-1/8DECG	62	16	48.43	18.33	44.5	1
	30.16	1030-30DECG	62	16	48.43	18.33	44.5	1
		1030-1-3/16DECG	62	16	48.43	18.33	44.5	1
		31.75	1030-1-1/4DECG	62	16	48.43	18.33	44.5
35	31.75	1035-1-1/4DECG	72	17	51.13	18.83	55.6	1
	34.925	1035-1-3/8DECG	72	17	51.13	18.83	55.6	1
		1035-35DECG	72	17	51.13	18.83	55.6	1
		36.512	1035-1-7/16DECG	72	17	51.13	18.83	55.6
40	38.1	1040-1-1/2DECG	80	18	56.33	21.43	60.3	1
		1040-40DECG	80	18	56.33	21.43	60.3	1
45	41.275	1045-1-5/8DECG	85	19	56.33	21.43	63.5	1
	42.862	1045-1-11/16DECG	85	19	56.33	21.43	63.5	1
	44.45	1045-1-3/4DECG	85	19	56.33	21.43	63.5	1
		1045-45DECG	85	19	56.33	21.43	63.5	1
50	47.625	1050-1-7/8DECG	90	20	62.73	24.64	69.9	1
	49.212	1050-1-15/16DECG	90	20	62.73	24.64	69.9	1
		1050-50DECG	90	20	62.73	24.64	69.9	1
55	50.8	1055-2DECG	100	21	71.42	27.84	76.2	1.5
	53.975	1055-2-1/8DECG	100	21	71.42	27.84	76.2	1.5
		1055-55DECG	100	21	71.42	27.84	76.2	1.5
		55.562	1055-2-3/16DECG	100	21	71.42	27.84	76.2

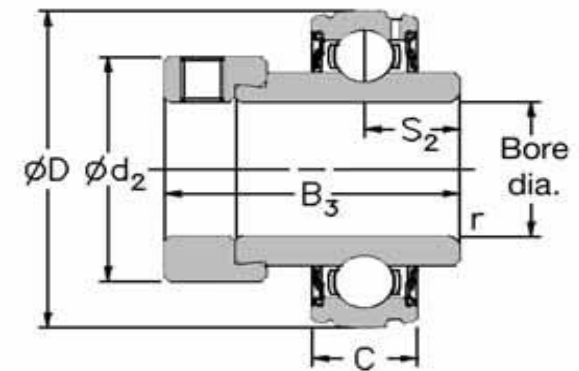


1000DECG With spherical outside diameter
and eccentric locking collar

Self-Lube[®] bearing inserts 1000DECG



Shaft Diameter (mm)		RHP designation	Dimensions(mm)					
Metric Range	Imperial Range		D	C	B3	S2	d2	r
60	57.15	1060-2-1/4DECG	110	22	77.84	31.04	84.2	1.5
		1060-60DECG	110	22	77.84	31.04	84.2	1.5
	60.325	1060-2-3/8DECG	110	22	77.84	31.04	84.2	1.5
	61.912	1060-2-7/16DECG	110	22	77.84	31.04	84.2	1.5
65	63.5	1065-2-1/2DECG	120	23	85.74	34.14	92	1.5
	63.5	1070-2-1/2DECG	125	24	85.74	34.14	97	1.5
		1070-65DECG	125	24	85.74	34.14	97	1.5
	66.675	1070-2-5/8DECG	125	24	85.74	34.14	97	1.5
	68.262	1070-2-11/16DECG	125	24	85.74	34.14	97	1.5
70		1070-70DECG	125	24	85.74	34.14	97	1.5
65		1075-65DECG	130	25	92.14	37.34	102	1.5
70	68.262	1075-2-11/16DECG	130	25	92.14	37.34	102	1.5
	69.85	1075-2-3/4DECG	130	25	92.14	37.34	102	1.5
		1075-70DECG	130	25	92.14	37.34	102	1.5
	73.025	1075-2-7/8DECG	130	25	92.14	37.34	102	1.5
	74.612	1075-2-15/16DECG	130	25	92.14	37.34	102	1.5
75		1075-75DECG	130	25	92.14	37.34	102	1.5

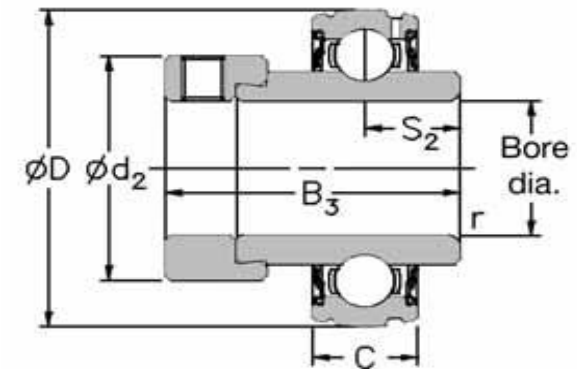


1000DECG With spherical outside diameter
and eccentric locking collar


Self-Lube[®] bearing inserts 1200EC and 1200ECG



Shaft Diameter (mm)		RHP designation		Dimensions(mm)					
Metric Range	Imperial Range			D	C	B2	S1	d2	r
12	12.7	1217-12EC	1217-12ECG	40	12	28.63	6.53	28.6	0.6
		1217-1/2EC	1217-1/2ECG	40	12	28.63	6.53	28.6	0.6
15	15.875	1217-15EC	1217-15ECG	40	12	28.63	6.53	28.6	0.6
		1217-5/8EC	1217-5/8ECG	40	12	28.63	6.53	28.6	0.6
16		1217-16EC	1217-16ECG	40	12	28.63	6.53	28.6	0.6
17		1217-17EC	1217-17ECG	40	12	28.63	6.53	28.6	0.6
	19.05	1220-3/4EC	1220-3/4ECG	47	14	31.03	7.53	33.3	1
20		1220-20EC	1220-20ECG	47	14	31.03	7.53	33.3	1
	22.225	1225-7/8EC	1225-7/8ECG	52	15	31.03	7.53	38.1	1
	23.812	1225-15/16EC	1225-15/16ECG	52	15	31.03	7.53	38.1	1
25		1225-25EC	1225-25ECG	52	15	31.03	7.53	38.1	1
	25.4	1225-1EC	1225-1ECG	52	15	31.03	7.53	38.1	1
	28.575	1230-1-1/8EC	1230-1-1/8ECG	62	16	35.73	9.03	44.5	1
30		1230-30EC	1230-30ECG	62	16	35.73	9.03	44.5	1
	30.16	1230-1-3/16EC	1230-1-3/16ECG	62	16	35.73	9.03	44.5	1
	31.75	1230-1-1/4EC	1230-1-1/4ECG	62	16	35.73	9.03	44.5	1
	31.75	1235-1-1/4EC	1235-1-1/4ECG	72	17	38.93	9.53	55.6	1
	34.925	1235-1-3/8EC	1235-1-3/8ECG	72	17	38.93	9.53	55.6	1
35		1235-35EC	1235-35ECG	72	17	38.93	9.53	55.6	1
	36.512	1235-1-7/16EC	1235-1-7/16ECG	72	17	38.93	9.53	55.6	1
	38.1	1240-1-1/2EC	1240-1-1/2ECG	80	18	43.73	11.03	60.3	1
40		1240-40EC	1240-40ECG	80	18	43.73	11.03	60.3	1
	41.275	1245-1-5/8EC	1245-1-5/8ECG	85	19	43.73	11.03	63.5	1
	42.862	1245-1-11/16EC	1245-1-11/16ECG	85	19	43.73	11.03	63.5	1
	44.45	1245-1-3/4EC	1245-1-3/4ECG	85	19	43.73	11.03	63.5	1
45		1245-45EC	1245-45ECG	85	19	43.73	11.03	63.5	1
	47.625	1250-1-7/8EC	1250-1-7/8ECG	90	20	43.73	11.04	69.9	1
	49.212	1250-1-15/16EC	1250-1-15/16ECG	90	20	43.73	11.04	69.9	1
50		1250-50EC	1250-50ECG	90	20	43.73	11.04	69.9	1
	50.8	1250-2EC	1250-2ECG	90	20	43.73	11.04	69.9	1



1200ECG With spherical outside diameter and eccentric locking collar

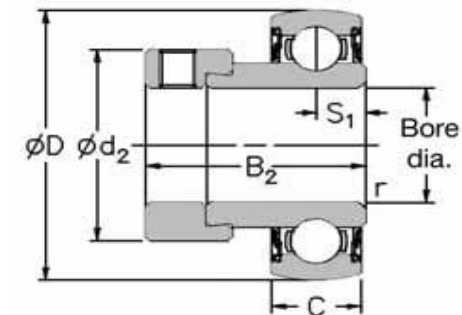

1200EC With spherical outside diameter, non-regreaseable outer ring and eccentric locking collar